



**STOCK[®]
LOCKS**
Standard Locks for Special Needs

The Family Of...



PO Box 200
Mauldin, SC 29662
Phone: 864-297-6655
Fax: 864-297-9987
national@compX.com
compX.com/national

715 Center Street
Grayslake, IL 60030
Phone: 847-752-2500
Fax: 847-752-2419
fort@compX.com
compX.com/fort


715 Center Street
Grayslake, IL 60030
Phone: 847-752-2600
Fax: 847-752-2420
timberline@compX.com
compX.com/timberline

PO Box 200
Mauldin, SC 29662
Phone: 864-297-6655
Fax: 864-297-9987
chicago@compX.com
compX.com/chicago

how cabinet locks are used

DOOR APPLICATION

Bolt or cam at side locks to frame.

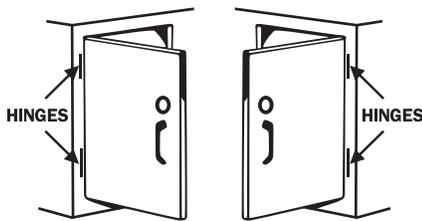


LEFT HAND

RIGHT HAND

At which edge of door hinges are located determines hand of door when facing door.


LID APPLICATION

Lock engages strike mounted on underside of lid.




SLIDING (By-pass) DOOR APPLICATION

Lock engages strike mounted on rear door.




SINGLE DRAWER APPLICATIONS

Drawer mounted lock – Bolt or cam locks on frame.

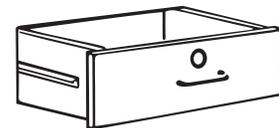


Frame mounted lock – Cam locks on back of drawer front with hook cam engaging strike.

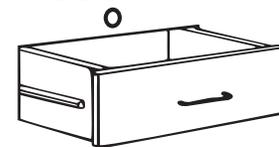

MULTIPLE DRAWER APPLICATIONS (Wood construction)

PEDESTAL/FILE

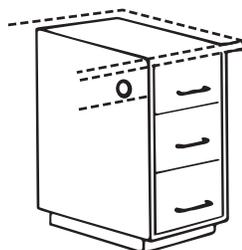


Side mounted gang lock – vertical bar movement – vertical bar movement locks all drawers simultaneously.

DESK




Center drawer mounted lock – Bolt locks on frame or top. Side drawer mechanism(s) actuated by locked center drawer secures drawers.

PEDESTAL/FILE

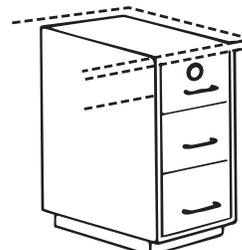

Top drawer mounted lock activates side mechanism securing other drawers.

LATERAL FILE

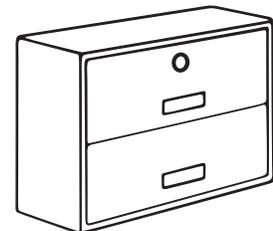

Top drawer mounted lock activates side mechanisms securing other drawer(s); also allows only opening one drawer at a time.

table of contents

Description	Page
Cams	17, 22 & 23
Cam Locks	4, 7, 12, 13, 16 & 19
Center Drawer Locking Hardware	18
Chest Locks	19
Circuit Breaker Cabinet Lock	21
Code Books	25
Deadbolt Locks	5, 6, 10, 11, 14, 16 & 17
Disc Tumbler Locks	11-21
Display Boards	27
Door & Drawer Locks	5, 6, 7, 10, 11, 14, 16, 17 & 19
Combination Cam Lock – DualAcess®	19
File Cabinet Locks	10 & 11
Furniture Locks	14-19
Gang Locks	14, 16 & 17
Garage Door Lock	21
Handle Locks	20
Install-tool, pin tumbler	6
Interchangeable Cylinder Locks	5, 6, 7, 15-17
Key Blanks	24 & 25

Description	Page
Key Hole Escutcheon	22
Keying Kits and Parts	26
Knob Locks	10
Lateral File Locking Hardware	18
Lever Tumbler Locks	19
Lid Locks	19
Mail Box Locks	8 & 9
Master Keys	25
Padlockable Cam Lock	21
Pedestal Locking Hardware	14, 16, 17, & 18
Pin Tumbler Locks	4-10
RemovaCore Furniture Locks	15-17
Replacement cylinder, pin tumbler	6
Screwdriver Cam Latch	13
Sliding Door Locks	10 & 11
Showcase Locks	10 & 11
Spring bolt Locks	5 & 14
Strikes & Mounting Plates	22
Warded Barrel Key Locks	19

numerical index

Part #	Page	Part #	Page	Part #	Page	Part #	Page	Part #	Page
V69B boards	27	C7020-22	17	D8090	14	C8701	11	C8850	15
V70P-1, 2, 3, 4	26	C7101-16	23	C8101-9	4	C8703-06	14	D8890	25
C500SP	22	C7120	22	C8131, 33, 35	5	C8710-26	8	C8896	11
C2001-17	22	C7137	10	C8137	10	C8730-35	9	D8950-52	18
C2018	17	C7163	7	C8139	5	C8747-59	20	D8999	25
C2073	5	D8001, 2	25	C8140-55	10	C8762, 63, 64	21	C9100-C9500	9
C3730-59	26	C8010	21	C8160, 61, 63	7	D8776, 77, 78	24	RC-078	6
D4290-97	24	D8030, 31	19	C8173-80	5	D8779	15	RC-138	6
D4299	25	C8040-47	11	C8183, 88	7	D8780-96	24	CXL-3713-078	6
D4300, 01	9, 25	C8051-55	12	D8193, 94	25	C8797	21	CXL-3713-138	6
D4400	9, 25	C8060, 61	13	C8207	19	D8798	24	CXL-3718-078	6
D6676-86	26	C8062	22	C8252, 53	19	D8799	25	CXL-3718-138	6
C6782-98	26	C8065	13	C8384	19	C8803	14	TL-078	6
C7001-14	23	C8070	21	C8414	19	C8826	19	TL-138	6
C7015	17	C8073, 75	13	D8419	25	C8830-36	16	DR-H-3713	6
C7017	12	C8080	13	D8590, 91	25	D8838-40	17	DWR-H-3718	6

finish codes

Finish code applies to exposed portions of lock and is indicated by part number suffix, i.e.: C8053-3 Bright Brass finish.

2C – Zinc Plated	4G – Antique Brass	26 – Bright Chrome
3 – Bright Brass	14A – Bright Nickel	26D – Dull Chrome
4 – Satin Brass	19 – Black	(brushed)

key codes

Key codes stamping may appear with or without zeros preceding other numbers, i.e.: C001A and C1A are the same key code.



Through your CompX National distributor — a program to meet your lock requirements.

CompX National manufactures a wide variety of locks for residential, commercial and industrial use. We've been solving security problems since the need for metal cabinet locks brought about the founding of our company in 1903.

The locks shown in this catalog are particularly well-suited to serve the replacement market, as well as component manufacturers.

Working through your CompX National distributor, we offer a program that is committed to serving your needs.

A complete selection of locks

- Door and drawer locks for virtually every application, every security requirement
- Wide variety of mail box locks
- Locking devices of every description for use in schools, institutional and commercial buildings
- Key blanks and keying kits to complement each of our locks


Packaged for your convenience

- All hardware is individually packed in see-thru poly-bags for product protection and easy inspection
- Poly-bags of like hardware are grouped in popular quantities and placed in handy cases
- Case designed for convenience in storage and ease in handling



pin tumbler cylinder cam locks


CAM DIMENSIONS

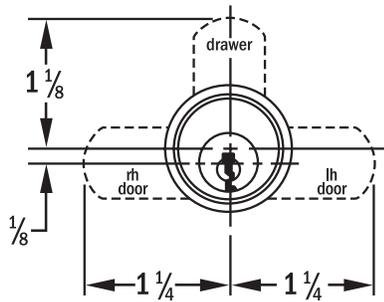


Through the use of a shifter, the 360° key turn turns the cam 90° in either direction. Actual application determines which cam position is the locked position. Each lock is furnished with an alternate cam for opposite cam turn.

Applications: solid lines show locked position of cam	Position of shifter on back of lock	Applications: solid lines show locked position of cam	Position of shifter on back of lock
right hand door	drawer	left hand door	drawer


MOUNTING HOLES FOR CYLINDER CAM LOCKS

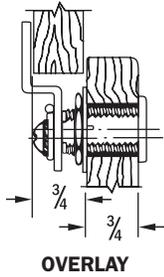

OVERLAY




Metal




Wood

BRASS CONSTRUCTION



FLUSH




LIPPED/
OVERLAY



C8102

The C8102, as shown above in both pictures, is a Multi-Functional Pin Tumbler Cam Lock with a 1-1/16" Cylinder Length. **The lock is packaged with four (4) cams, two straight and two double formed.** This allows the lock to be used for multiple applications for either drawer or right hand/left hand doors with lipped or overlay construction.



LIPPED/
OVERLAY




C8101
C8103
C8109

APPLICATION – For drawer, R.H. or L.H. doors. C8103 and C8109 are for lipped or overlay construction. For overlay application, the combined thickness of front and frame cannot exceed the cylinder length. Also see overlay detail below. The other locks are for flush application.

OPERATION – 90° cam turn, key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1.


PACKAGING – Supplied with two keys, trim washer, spur washer for wood, C2014 cam lock mounting plate for wood, mounting nut and two cams. If flat washer (for metal) is needed, order C2015-2C separately. See page 22.



FLUSH



C8106
C8108



OVERLAY

Specific cams to be used with C8102 lock are available for overlay construction using a 3/4" thick front and 3/4" thick frame. See page 23 for details.

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
					KD	MKKD			
C8101-26D	Lipped/Overlay	15/16"	5/8"	4	850	650	10	M2-0106B	D4291
C8101-4		15/16"	5/8"	2	850		10	M2-0106B	D4291
C8102-26D	Flush	1-1/16"	3/4"	4	850	650	10	M2-0106DF	D4291
C8102-4	Flush	1-1/16"	3/4"	2	850		10	M2-0106DF	D4291
C8103-26D	Lipped/Overlay	1-3/16"	7/8"	4	850	650	10	M2-0106L	D4291
C8103-4		1-3/16"	7/8"	2	850		10	M2-0106L	D4291
C8106-26D	Flush	1-7/16"	1-1/8"	4	850	650	10	M2-0106MF	D4291
C8106-4	Flush	1-7/16"	1-1/8"	2	850		10	M2-0106MF	D4291
C8108-26D	Flush	1-3/4"	1-3/8"	4	850	650	10	M2-0106NF	D4291
C8108-4	Flush	1-3/4"	1-3/8"	2	850		10	M2-0106NF	D4291
C8109-26D	Lipped/Overlay	1-3/4"	1-1/2"	4	850	650	10	M2-0106N	D4291
C8109-4		1-3/4"	1-1/2"	2	850		10	M2-0106N	D4291



*Key Codes used: 2 Codes – 107 and 915.

4 Codes – 101, 103, 107 and 915.



pin tumbler door & drawer locks



For more information about BHMA certified locks, visit compX.com/csp_bhma.html

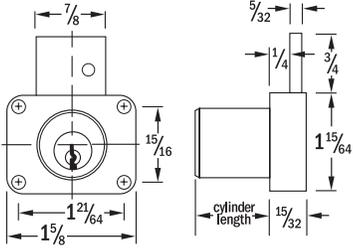


**C8177,
C8178,
C8179,
C8180**

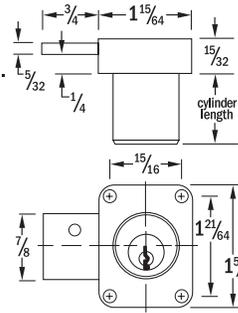

C8173, C8174, C8175

Re-Keying Made Easy
**ADVANTAGE™
+PLUS**

To see a video of Advantage PLUS+ visit CompX online: compX.com/advplus

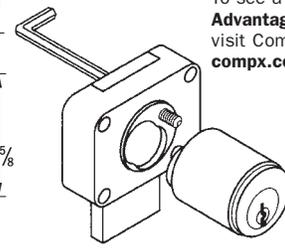

The PLUS feature allows you to remove the cylinder from our pin tumbler box locks while the lock remains in place. No mounting screws need to be removed. Simply use a 5/64" allen wrench from the back to remove the cylinder and plug for re-keying.

APPLICATION – For drawers, R.H. or L.H. doors. Surface mounted. Requires 57/64" diameter hole for cylinder.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys, strike and mounting screws. If trim ring is required, order C2017 separately. See page 22.

Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA * Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKKD			
C8173-26D	Door	Dead	7/8"	3/4"	4	850	650	10	M2-3713-301	D4291
C8173-4	Door	Dead	7/8"	3/4"	2	850	650	10	M2-3713-301	D4291
C8173-4G	Door	Dead	7/8"	3/4"	2	850	—	10	M2-3713-301	D4291
C8174-26D	Door	Dead	1-1/8"	3/4"	4	850	650	10	M2-3713-311	D4291
C8175-26D	Door	Dead	1-3/8"	3/4"	4	850	650	10	M2-3713-321	D4291
C8178-26D	Drawer	Dead	7/8"	3/4"	4	850	650	10	M2-3718-301	D4291
C8178-4	Drawer	Dead	7/8"	3/4"	2	850	—	10	M2-3718-301	D4291
C8178-4G	Drawer	Dead	7/8"	3/4"	2	850	—	10	M2-3718-301	D4291
C8177-26D	Drawer	Dead	1-1/8"	3/4"	4	850	—	10	M2-3718-311	D4291
C8179-26D	Drawer	Dead	1-3/8"	3/4"	4	850	650	10	M2-3718-321	D4291
C8179-4	Drawer	Dead	1-3/8"	3/4"	2	850	—	10	M2-3718-321	D4291
C8180-26D	Drawer	Dead	1-5/8"	3/4"	4	850	650	10	M2-3718-331	D4291



C2073
1/8" black plastic spacer for pin tumbler door and drawer locks. 25 pcs. per bag.



Certified Grade 2 locks also available for MRI applications — non-ferrous or non-magnetic versions. Made to order.

NEW!

All locks above are ANSI/BHMA certified Grade 2 A156.11. Grade 1 locks are available as special order.




C8133, C8135

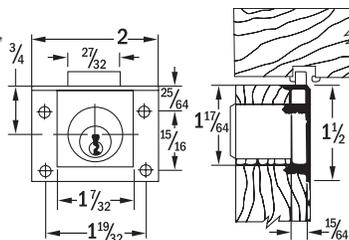

C8131



C8139

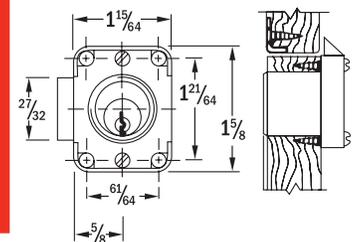

APPLICATION – For drawers. Half mortise type requires mortise for housing and 57/64" diameter hole for cylinder. C8139 is surface mounted.

OPERATION – Key removable in both locked and unlocked positions except C8131 and C8139.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1. Not rekeyable.

PACKAGING – Supplied with two keys, strike and mounting screws. If trim ring is required, order C2017 separately. See page 22.

Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA * Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKKD			
C8131-26D**	Drawer	Spring	7/8"	7/32"	4	850	650	10	M2-3701-121	D4291
C8131-4**	Drawer	Spring	7/8"	7/32"	2	850	—	10	M2-3701-121	D4291
C8133-26D	Drawer	Dead	7/8"	1/4"	4	850	—	10	M2-3700-111	D4291
C8133-4	Drawer	Dead	7/8"	1/4"	2	850	—	10	M2-3700-111	D4291
C8135-26D	Drawer	Dead	1-1/8"	1/4"	4	850	—	10	M2-3700-159	D4291
C8139-26D**	Door	Spring	3/4"	7/32"	4	850	650	10	M2-3719-092	D4291

*Key Codes used: 2 Codes – 107 and 915.

4 Codes – 101, 103, 107 and 915.

**Key removable in locked position only.

For more information: compX.com/national | 864.297.6655



JUST REPLACE THE CYLINDER

NO NEED TO RE-PIN AND CUT NEW KEYS



APPLICATION – For existing drawers and R.H. or L.H. doors.
OPERATION – Key removable in both locked and unlocked positions.
KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying available.
PACKAGING – Supplied with locking cylinder, two keys, sleeve

Replacement Cylinder Part No.	CompX National Part No.	Installation	Cylinder Length
RC-078*	C8173-26D	Door	7/8"
RC-078*	C8178-26D	Drawer	7/8"
RC-138*	C8179-26D	Drawer	1-3/8"

* Not part of the STOCK LOCKS program

- Two cylinder sizes: 7/8" and 1-3/8"
- No need to specify door or drawer – each replacement cylinder size will work on door OR drawer applications
- Keying options: KA, KD, MKKD
- Finish: 26D (dull chrome)
- Package includes: locking cylinder, two keys, sleeve



The Advantage Plus feature allows easy removal of the locking cylinder from the lock body without having to remove the lock body from the application. Simply insert a 5/64" Allen tool into the back of the lock and remove the locking cylinder from the front.

CompXpress Special keyed replacement cylinders available through **CompXpress!**

Shipped next business day from one of two locations (Rancho Cucamonga, CA & Mauldin, SC). Master keyed, keyed alike in groups.

NEW install-tool for pin tumbler door and drawer lock

COMPX-LEAN
NEW! OPTION

Ship casework on time without having to wait for locks because of delayed key schedules

How to use

Stock housings (door, drawer) and install-tools in both lengths, **assemble prior to installation**

Part number	Description	Cylinder Length	Installation
TL-078	Install-tool	7/8"	door, drawer
TL-138	Install-tool	1-3/8"	door, drawer
DR-H-3713*	Cabinet door housing	—	door
DWR-H-3718*	Cabinet drawer housing	—	drawer


* Includes mounting hardware, strike

– OR –


Order the housings with install-tool **pre-assembled**

Part number	Description	Cylinder Length	Installation
CXL-3713-078	Install-tool with door housing	7/8"	cabinet door
CXL-3713-138	Install-tool with door housing	1-3/8"	cabinet door
CXL-3718-078	Install-tool with drawer housing	7/8"	cabinet drawer
CXL-3718-138	Install-tool with drawer housing	1-3/8"	cabinet drawer


CompX Lean is not part of the STOCK LOCKS program

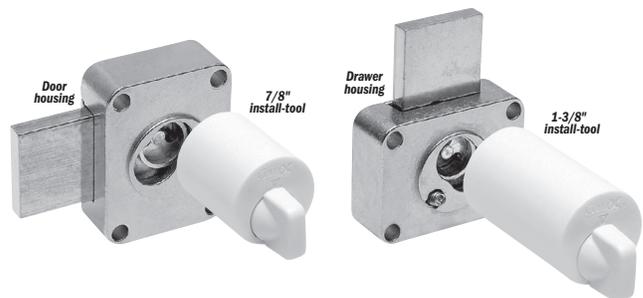

- Ship casework on time without having to wait for locks due to key schedules
- No need to specify door or drawer – each install-tool size will work on door OR drawer applications
- Two cylinder sizes: 7/8" & 1-3/8"
- Install-tool has thumb turn to lock / unlock application for shipping
- Keyed-to-schedule replacement cylinders sent to the job site (see Replacement Cylinder section above)
- During installation of casework, remove install-tool and insert replacement cylinders with Advantage Plus

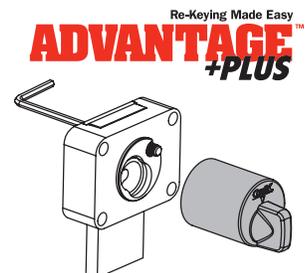

pin tumbler drawer locks

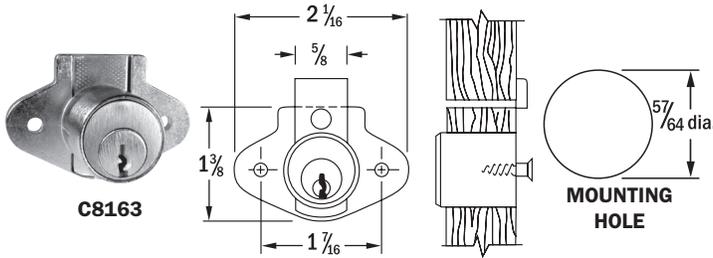

"THE ADVANTAGE PLUS"



Extended bolt for C8163 drawer lock provides 3" extension, can be cut to required length. Packed 20 pcs. per bag.

C7163-2C

APPLICATION – For drawers. Surface mounted. Requires 57/64" diameter hole for cylinder.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys and mounting screws. If trim ring is required, order C2017 separately. See page 22.

C8163 locks feature easy removal of cylinder from lock housing while lock remains in place. Bolt has access hole for cylinder retention screw at back of lock. U.S. Patent No. 4.899.563.

Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKKD			
C8163-26D	Drawer	Dead	15/16"	11/32"	4	850	650	10	M2-3705	D4291
C8163-4	Drawer	Dead	15/16"	11/32"	4	850	650	10	M2-3705	D4291

pin tumbler door & drawer locks

"THE ADVANTAGE PLUS" CAM LOCKS

The locks are fastened in place with two screws for easy installation. Re-keying or servicing is accomplished by removing the cam retaining screw and cam. Use a 5/64" allen wrench to remove the plug cylinder assembly. The mounting plate remains installed on the cabinet. Re-key as required and reinstall cylinder plug assembly on mounting plate.

U.S. PATENT NO. 5.678.438

APPLICATION – For drawer, R.H. or L.H. doors. C8183 assembled for door function. C8188 assembled for drawer function.

OPERATION – 90° cam turn, key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 and 9. See table for available keying. Master keying to GM1.



ONE LOCK, TWO FUNCTIONS
DOOR OR DRAWER



C8183
Assembled as a Door Lock



C8188
Assembled as a Drawer Lock

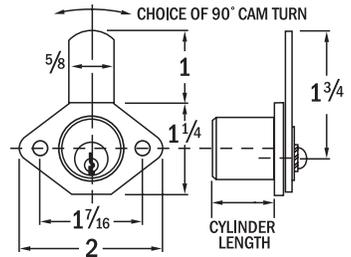


PACKAGING – Supplied with two keys, extra backplate, two cams and two mounting screws. If trim ring is required, order C2017 separately. See page 22. **Note:** If formed cam is required, order C7113 or C7116. See page 23.

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
					KD	MKKD			
C8183-26D	Flush	7/8"	7/8"	4	850	650	10	M2-8183	D4291
C8188-26D		1-3/8"	1-3/8"	4	850	650	10	M2-8188	D4291

*Key Codes used: 4 Codes – 101, 103, 107 and 915.

pin tumbler drawer lock

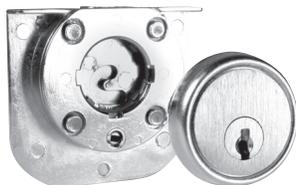

C8161


C8160

APPLICATION – Replacement lock housing and cylinder for drawers with 7/8" thick fronts. Half mortise design.

OPERATION – Key removable in both locked and unlocked positions. Interchangeable cylinders are attached or removed through the use of a special key at back of lock.

KEYING – Keyed differently (100 changes).

PACKAGING – C8160 cylinder supplied with two keys. C8161 lock housing supplied with cylinder removal key and mounting screws.

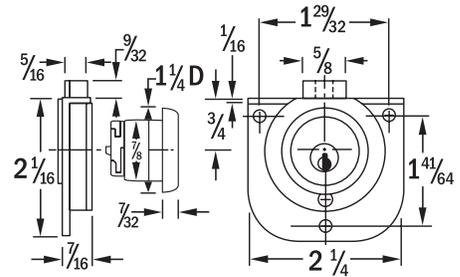

Part No.	Type of Mounting or Installation	Bolt Type	Minimum Material Thickness	Bolt Travel	Key Changes KD	Case Quantity	Reference Number	Key Blank
C8160-26D	In Housing	—	—	—	100	10	M2-3720-025	D4292
C8161-26	Drawer	Dead	7/8"	9/32"	—	10	M3-3720-011	—

Part No.: **M337201341W0101** for replacement cylinder removal keys.

pin tumbler mail box locks

GENUINE FACTORY REPLACEMENT LOCKS

APPLICATION – For doors on architectural mail boxes serviced by United States Postal Service.


















OPERATION – 90° cam turn. See drawing for specific operation.

Key removal in locked position only. Cams not removable.

KEYING – Available keyed differently only (1,000 changes). Key blank part number D4291.

PACKAGING – Supplied with two keys and a spring mounting clip. C8720 furnished with trim ring. Case quantity 25.



*C8712 and C8720 are provided with a **threaded cylinder**, with proper clip grooving.

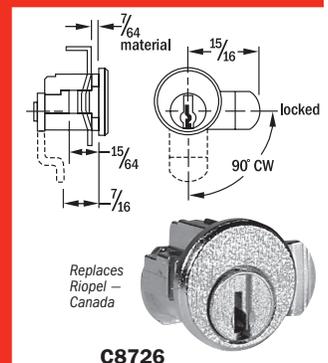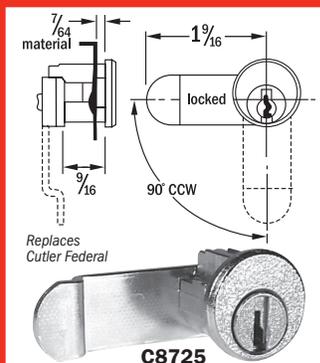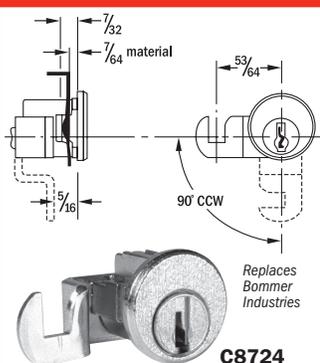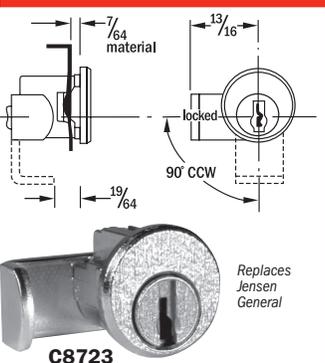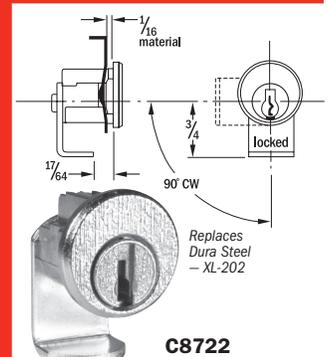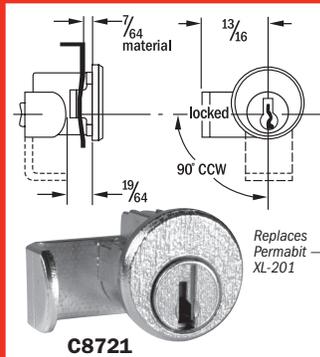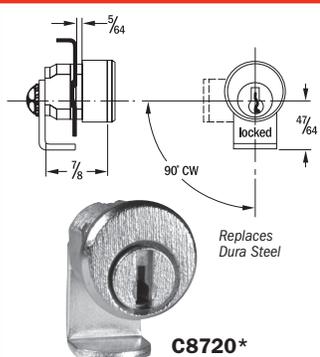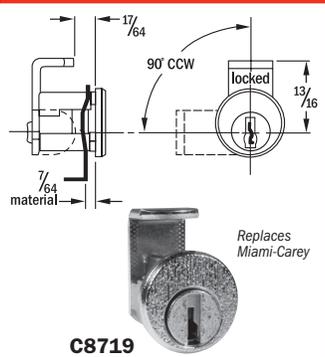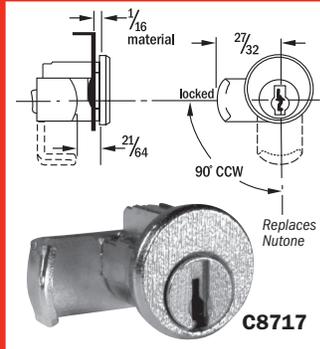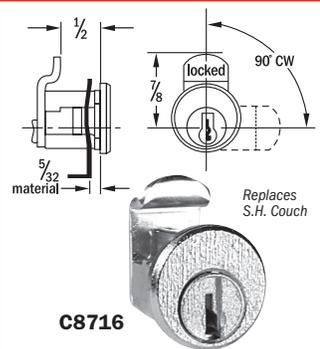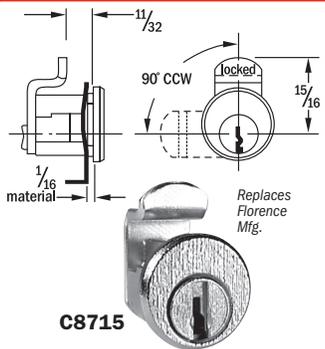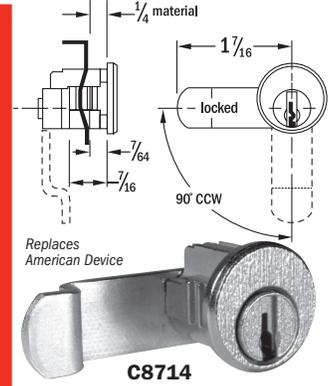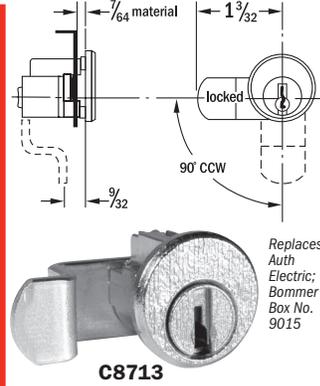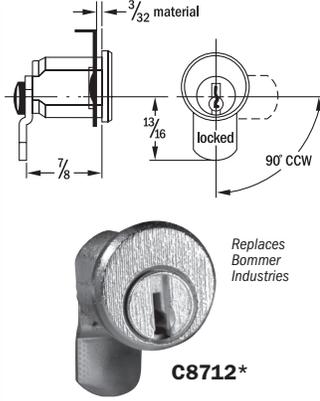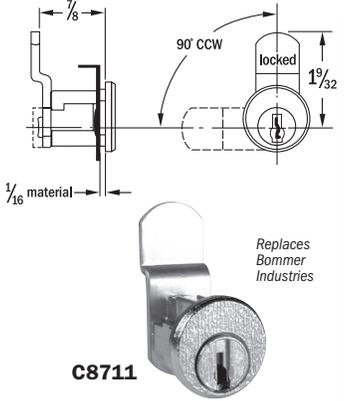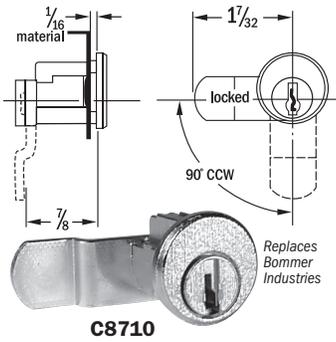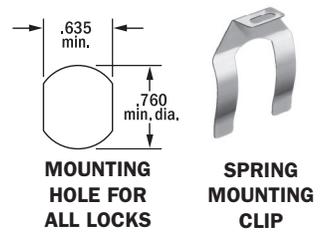

pin tumbler "multi-cam"™ mail box locks



C8730

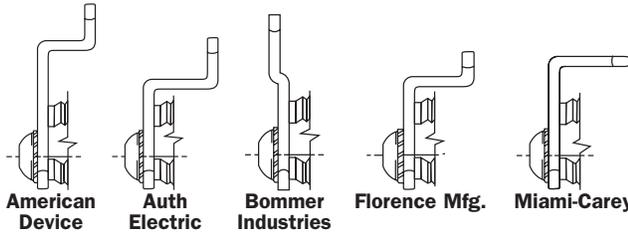


APPLICATION – Interior architectural mail boxes used in apartments, condominiums, schools, lobbies. Nut or clip mounted.

OPERATION – 90° counter-clockwise cam turn to open.

Key removable in locked position only.



KEYING – Available keyed differently only (1,000 changes). Key blank part number D4291.

PACKAGING – Supplied with selection of five cams, two keys, mounting nut, mounting clip and cam screw. Case quantity 25.



MOUNTING HOLE FOR C87XX LOCKS

C8735

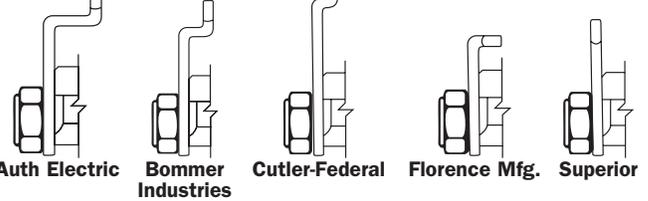

THIS LOCK MEETS U.S.P.S. SPECIFICATION #L-1172 AND DRAWING #1003833 FOR NDCBU AND CBU APPLICATIONS.

APPLICATION – Exterior pedestal-mounted neighborhood boxes. Has keyway dust shutter for lock protection. Clip mounted.

OPERATION – 90° clockwise cam turn to open. Key removable in locked position only.

KEYING – Available keyed differently only (1,000 changes). Key blank part number D4291.

PACKAGING – Supplied with a selection of five cams, two keys, mounting clip, cam locking nut. Case quantity 25.

C8732 same as C8735 without cams, with 90° cw.

C8733 same as C8735 without cams, with 90° ccw.

new pin tumbler mailbox locks

C9100 & C9200 are the only mailbox locks approved by USPS for 4C (CBU) mailboxes.

USPS specification "USPS-L-1172C" for USPS-STD-4C mailboxes



**C9100
C9200**



Key Blank codes:

Standard Part no.	Reverse Part no.
D4300	D4301
1000 - 1999	2000 - 2999
3000 - 3999	4000 - 4999

Key blanks ship 50 per box.

- ♦ Lock can withstand 1000 pounds of force applied to the cam
- ♦ Accommodates up to 3/16" thick cam C7120
- ♦ Drain holes on the bottom of the cylinder

APPLICATION – Exterior pedestal-mounted neighborhood boxes. Has keyway dust shutter for lock protection. Clip mounted.

OPERATION – C9100 operates clockwise. C9200 operates counter clockwise. Key removable in locked position only.


KEYING – Available keyed differently only (2,000 changes). See chart for correct key blank part number.

PACKAGING – Includes: a spring clip, mounting nut and (3) keys. Case quantity 25.

Replacement cam part number C7120 available as separate item. See page 22.

new! postal locks for non-USPS delivered sites

These new postal locks are for private delivery postal mailboxes only in colleges, universities, commercial buildings, mail / parcel centers. They are direct drop-in replacements for original USPS locks.

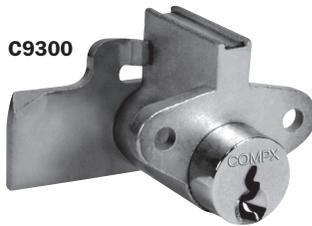

C9300

APPLICATION – Interior, pedestal-mounted or in-wall boxes. Screw mounted. Hardware not included. Commercial equivalent of USPS 306B.

OPERATION – 90° counter-clockwise cam turn to open. Key removable in locked position only.

KEYING – Available keyed differently only (4,000 changes). Key blank part number D4400.

PACKAGING – Supplied with cam assembled and three keys. Case quantity 25.



D4400

Replacement key blanks ship 10 per bag.



C9400

APPLICATION – Interior, pedestal-mounted or in-wall boxes. Screw mounted. Hardware not included. Commercial equivalent of USPS 306D.

OPERATION – 90° counter-clockwise cam turn to open. Key removable in locked position only.

KEYING – Available keyed differently only (4,000 changes). Key blank part number D4400.

PACKAGING – Supplied with cam assembled and three keys. Case quantity 25.



C9500

APPLICATION – Interior, pedestal-mounted or in-wall boxes. Screw mounted. Hardware not included. Commercial equivalent of USPS 308.

OPERATION – 30° counter-clockwise cam turn to open. Key removable in locked position only.


KEYING – Available keyed differently only (4,000 changes). Key blank part number D4400.

PACKAGING – Supplied with three keys. Case quantity 25.

pin tumbler drawer locks



MOUNTING HOLES

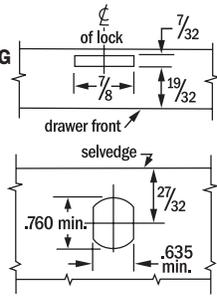

New – C8137 lock with STAINLESS STEEL bolt!

The stainless steel bolt withstands a higher degree of abuse and is a direct replacement for existing C8137 with die-cast bolts.

APPLICATION – For center drawers of metal desks. Fits special piercing of drawer front and selvage (see drawing).

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 & 9. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys, mounting nut and stainless steel insertable bolt.

Part No.: C7137 – Stainless steel replacement insertable bolts. Sold in bags of 10.

M337272116X150J – Die-cast replacement insertable bolts.


Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKKD			
C8137-26D	Metal Drawer, 1/4" Max Mat'l Thickness	Stainless steel Insertable Dead Bolt	19/32"	7/16"	4	850	650	10	M2-3727-001	D4291

*Key Codes used: 4 Codes – 101, 103, 107 and 915.

pin tumbler sliding door, file cabinet locks



**C8142
C8143**

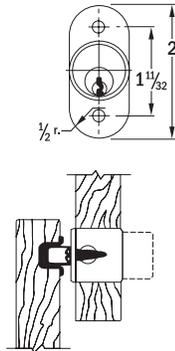

APPLICATION – C8140 is for sliding glass doors. C8142 and C8143 are for wood sliding doors and require a 7/8" diameter hole in front door for cylinder. C8150 is used internally on filing cabinets to gang lock drawers.


OPERATION – C8140 and C8150: key removable in locked position only. C8142 and C8143: key removable in both locked and unlocked positions.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 & 9. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys. C8142 and C8143 furnished with strike and mounting screws. If trim ring is required, order C2017 separately. See page 22.




C8150

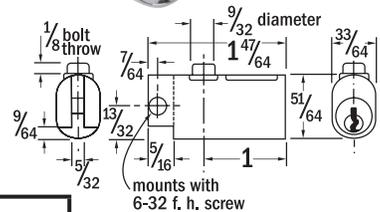


Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKKD			
C8140-26D	Plate Glass Sliding Doors	Internal Spring	—	—	4	100	—	10	M2-0225-001	D4291
C8142-26D	Sliding Doors	Plunger	1-1/8"	7/16"	6	100	100	10	M2-3707-157	D4291
C8142-4	Sliding Doors	Plunger	1-1/8"	7/16"	2	100	—	10	M2-3707-157	D4291
C8143-26D	Sliding Doors	Plunger	1-3/8"	7/16"	4	100	—	10	M2-3707-160	D4291
C8143-4	Sliding Doors	Plunger	1-3/8"	7/16"	2	100	—	10	M2-3707-160	D4291
C8150-26D	Filing Cabinet	Spring	—	1/8"	5	850	—	10	M2-4847-001	D4291

*Key Codes used: 2 Codes – 107 and 915.
4 Codes – 101, 103, 107 and 915.
5 Codes – 101, 102, 103, 107 and 915.
6 Codes – 101, 103, 105, 106, 107 and 915.

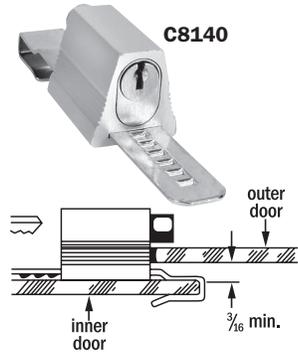

C8140

pin tumbler knob locks

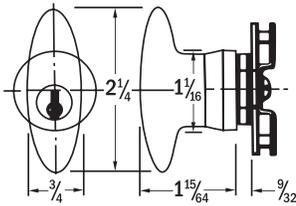

C8154, C8155


APPLICATION – For metal cabinets doors. Reversible for R.H. or L.H. application. Latch plate is used for either in 2** or 3 point latching.

OPERATION – 90° turn to open. Choice of key operation, see table.

KEYING – Will key together with all other pin tumbler locks using D4291 key blank except locks shown on pages 8 & 9. See table for available keying. Master keying to GM1.

PACKAGING – Supplied with two keys, mounting nut and screw for latch plate.

**Install with tongue pointing away from jamb.

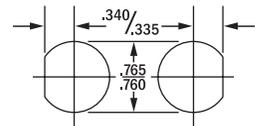


**L.H. Door R.H. Door
MOUNTING HOLES**

Part No.	Installation	Operation of Key	Maximum Material Thickness	KA* Codes	Key Changes KD	Case Quantity	Reference Number	Key Blank
C8154-26D	Door	Key Removable in Both Locked and Unlocked Positions	1/8"	3	650	10	M2-0721-010 w/ M3-6921	D4291
C8155-26D	Door	Key Removable in Locked Position Only	1/8"	1	650	10	M2-0721-060 w/ M3-6921	D4291

*Key Codes used: 1 Code – 915.
3 Codes – 103, 107 and 915.

disc tumbler drawer locks

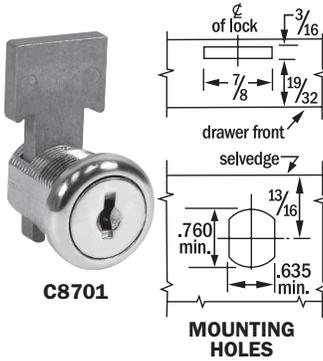


APPLICATION – C8701: for center drawers of metal desks. Fits special piercing of drawer front and seldge (see drawing). C8896 is a specific replacement lock.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – C8701 will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.


PACKAGING – Supplied with two keys. C8701 furnished with mounting nut.

Part No.: M503441026X150J – Replacement insertable bolts for C8701.

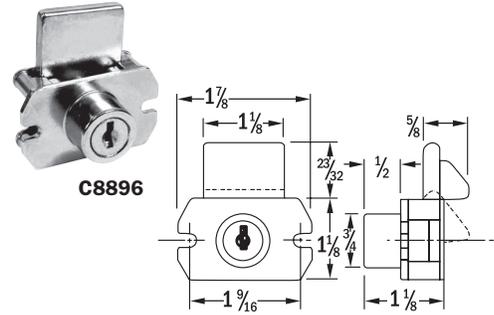

Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Key Blank
						KD	MKGD			
C8701-14A	Metal Drawer, 1/4" max. mat'l. thickness	Reinforced Insertable Dead Bolt	19/32"	11/32"	6	200	200	25	M4-0344-001	D8785
C8896-26D	Desk Drawer	Dead	1/2"	5/8"	1	50	—	10	M4-5596-001	D8785

disc tumbler sliding door locks

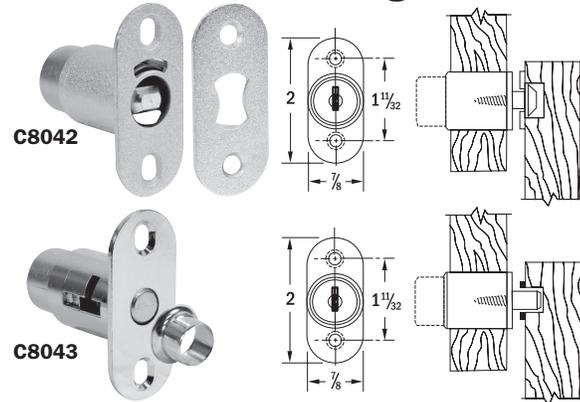

APPLICATION – C8040 for glass sliding by-pass doors up to 1/4" thick. C8042 and C8043 for wood sliding doors - requires a 7/8" diameter hole in front door.

OPERATION – C8040: key removable in locked position only. C8042: push in cylinder, key turn engages bolt behind strike. C8043: pushing in cylinder locks doors. Key removable in both locked and unlocked positions.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for keying. Master keying to E41A using D8783 key blank.

PACKAGING – C8040 supplied with two keys and felt pad to be applied to back of lock body. C8042 and C8043 supplied with two keys, strike and mounting screws. If trim ring is required, order C2017 separately – see page 22.



Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Non MK Key Blank
						KD	MKGD			
NEW! C8040-14A	Sliding Glass Doors	Bolt	N/A	N/A	6	200	200	10	N/A	D8785
C8042-26D	Sliding Glass Doors	90° Turn Hook	7/8"	7/16"	3	200	—	10	M4-0057-001	D8785
C8043-26D	Sliding Doors	Plunger	1"	7/16"	6	200	200	10	M4-0055	D8785
C8043-3	Sliding Doors	Plunger	1"	7/16"	6	200	—	10	M4-0055	D8785
C8043-14A	Sliding Doors	Plunger	1"	7/16"	6	200	—	10	M4-0055	D8785

*Key Codes used: 1 Code – C415A • 3 Codes – C346A, C413A and C415A • 6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

disc tumbler file cabinet locks




APPLICATION – Used internally on filing cabinets to gang lock drawers.

OPERATION –Key removable in locked position only.

KEYING – Keyed only to "Pundra" keyway. See table for available keying.

PACKAGING – Supplied with two keys.



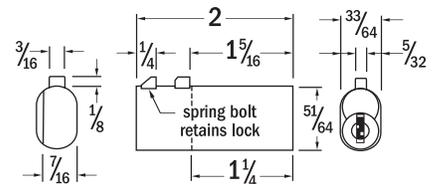


REPLACEMENT FOR "SHAW WALKER"


Part No.	Installation	Bolt Type	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Key Blank
					KD	MKGD		
C8047-26	Filing Cabinet	Spring	1/8"	1	200	—	10	D8776

* Key Codes used: 1 Code – P141A.

disc tumbler cylinder cam locks

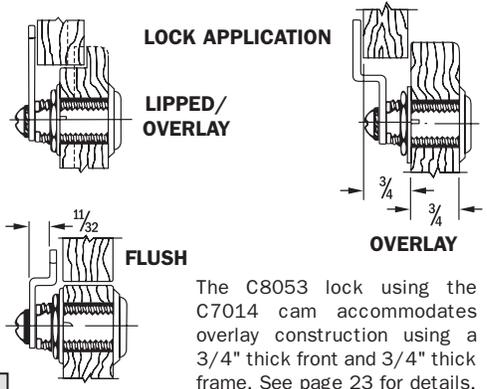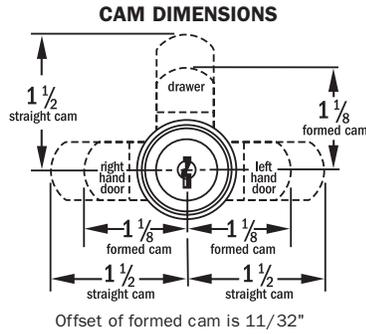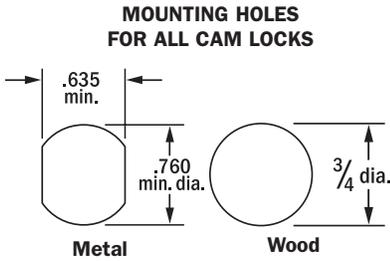

All locks feature **FlexaCam™**
 U.S. Patent No. 9,512,653. Three spacers enclosed with most CompX National threaded disc tumbler cam locks offer three thicknesses – providing up to 12 different dimensional variations.



APPLICATION – For drawers, R.H. or L.H. doors with lipped/overlay construction (straight cam) or flush construction (formed cam). For overlay application, the combined thickness of front and frame cannot exceed the cylinder length. Also see overlay detail at above right.

OPERATION – 90° cam turn on all locks. Key removable in both locked and unlocked positions.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys, trim washer, spur washer (for wood), mounting nut and two cams. If flat washer (for metal) is needed, order C2015-2C separately. See page 22.




C8051 Locks furnished with cams unassembled

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes		Case Quantity	Reference Number	Non MK
					KD	MKKD			Key Blank
C8051-14A	Lipped/Overlay or Flush	7/16"	7/64"	10	200	200	25	M4-0553	D8785
C8051-3		7/16"	7/64"	3	200	—	25	M4-0553	D8785
C8052-14A		5/8"	15/64"	10	200	200	25	M4-0054	D8785
C8052-3		5/8"	15/64"	3	200	—	25	M4-0054	D8785
C8054-14A		15/16"	5/8"	10	200	200	25	M4-0054B	D8785
C8054-3		15/16"	5/8"	3	200	—	25	M4-0054B	D8785
C8054-4G		15/16"	5/8"	3	200	—	25	M4-0054B	D8785
C8053-14A		1-3/16"	7/8"	10	200	200	25	M4-0054C	D8785
C8053-3		1-3/16"	7/8"	6	200	200	25	M4-0054C	D8785
C8053-4G		1-3/16"	7/8"	6	200	200	25	M4-0054C	D8785
C8055-14A		1-7/16"	1-1/8"	10	200	200	25	M4-0054L	D8785
C8055-3		1-7/16"	1-1/8"	6	200	200	25	M4-0054L	D8785
C8055-4G		1-7/16"	1-1/8"	6	200	200	25	M4-0054L	D8785

*Key Codes used: 3 Codes – C346A, C413A and C415A.
 6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.
 10 Codes – C205A, C267A, C346A, C361A, C390A, C413A, C415A, C420A, C441A and C642A.

new! Self-locking SlamCAM – spring loaded latch

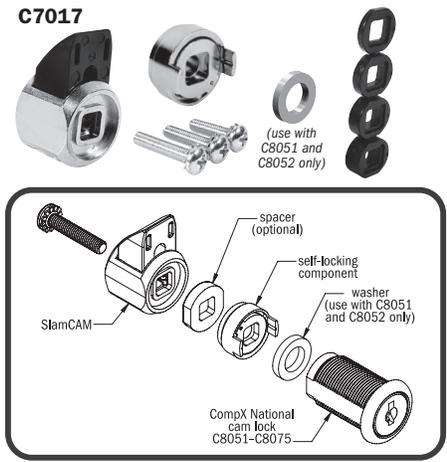

True convenience — release the key, and the self-locking component automatically returns the lock, along with SlamCAM (patent 9,605,455), to the locked position.




Part No.	Description	SlamCAM dimensions	Self-locking dimensions	Box quantity
NEW! C7017	SlamCAM, a spring loaded latch, along with the self-locking component, converts CompX National cam locks (C8051-C8075) into self-locking	13/16" wide, 1-7/16" high, 25/32" deep	3/4" diameter, 5/16" deep	25

Note: Using the self-locking component adds 5/16" to the length of the lock.
INSTALLATION NOTE: For C8051 and C8052, the washer must be installed between the cylinder and the self-locking component to secure the lock plug properly.

PACKAGING: Packaged with SlamCAM, self-locking component, four spacers, washer and three mounting screws
 View the SlamCAM video: compX.com/slamcam



disc tumbler cylinder cam locks

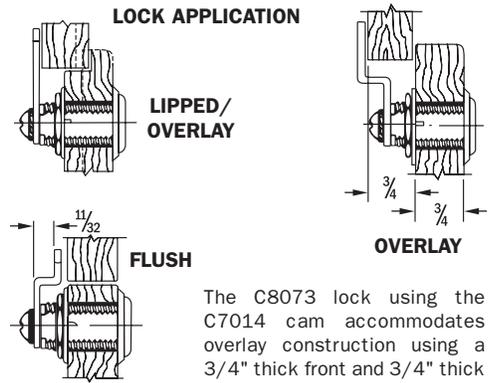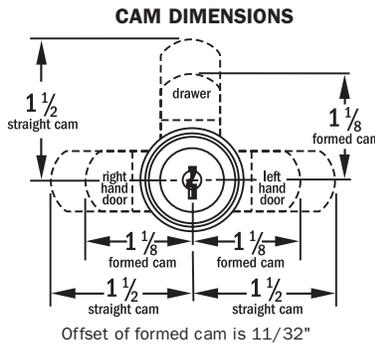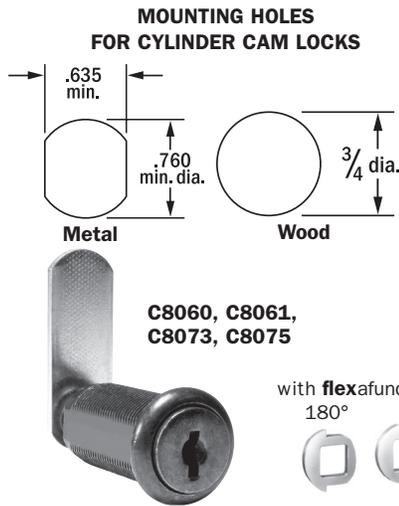

The C8073 lock using the C7014 cam accommodates overlay construction using a 3/4" thick front and 3/4" thick frame. See page 23 for details.

All locks feature **FlexaCam™** (Patented) Three spacers enclosed with most CompX National threaded disc tumbler cam locks offer three thicknesses – providing up to 12 different dimensional variations. See diagram on page 12.

APPLICATION – For drawers, R.H. or L.H. doors with lipped/overlay construction (straight cam) or flush construction (formed cam). For overlay application, the combined thickness of front and frame cannot exceed the cylinder length. Also see overlay detail at above right.

OPERATION – Choice of either 90° or 180° cam turn. Key removable in both locked and unlocked positions.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys, trim washer, spur washer (for wood), mounting nut, two cams and two stop washers. If flat washer (for metal) is needed, order C2015-2C separately. See pg. 22.




APPLICATION – For doors and drawers. Surface mounted.

Requires 3/4" diameter hole for cylinder

OPERATION – Choice of either 90° or 180° cam turn. Key removable in both locked and unlocked positions.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys, two mounting screws, two formed cams and two stop washers. Assembled for 90° cam turn.

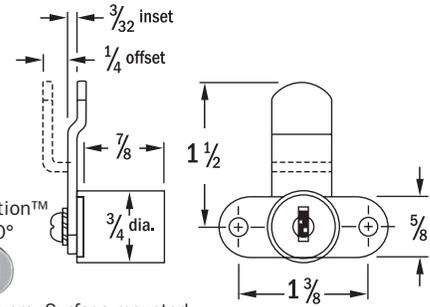

NEW!
NEW!
NEW!

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes		Case Quantity	Reference Number	Non MK Key Blank
					KD	MKKD			
C8060-14A	Lipped/Overlay or Flush	1-3/4"	1-7/16"	10	200	200	25	M4-8060	D8785
C8060-3		1-3/4"	1-7/16"	6	200	200	25	M4-8060	D8785
C8060-4G		1-3/4"	1-7/16"	6	200	200	25	M4-8060	D8785
C8061-14A		2"	1-13/16"	6	200	200	25	M4-8061	D8785
C8061-3		2"	1-13/16"	6	200	200	25	M4-8061	D8785
C8061-4G		2"	1-13/16"	6	200	200	25	M4-8061	D8785
C8073-14A		1-3/16"	7/8"	10	200	200	25	M4-8073	D8785
C8073-3		1-3/16"	7/8"	6	200	200	25	M4-8073	D8785
C8073-4G		1-3/16"	7/8"	6	200	200	25	M4-8073	D8785
C8075-14A		1-7/16"	1-1/8"	6	200	200	25	M4-8075	D8785
C8075-3		1-7/16"	1-1/8"	6	200	200	25	M4-8075	D8785
C8075-4G		1-7/16"	1-1/8"	6	200	200	25	M4-8075	D8785
**C8080-14A		7/8"	7/8"	6	200	200	25	M4-8080	D8785
**C8080-3		7/8"	7/8"	6	200	200	25	M4-8080	D8785
**C8080-4G		7/8"	7/8"	6	200	200	25	M4-8080	D8785


All locks feature flexafunction™
Stop washers provide for either 180° or 90° cam turn.

* Key Codes used:
6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

* Key Codes used:
10 Codes – C205A, C267A, C346A, C361A, C390A, C413A, C415A, C420A, C441A and C642A.

** Not available with FlexaCam™

screwdriver cam latch

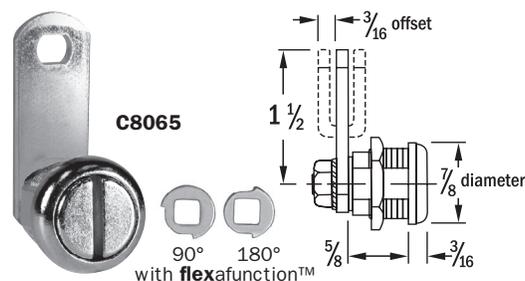

APPLICATION – For drawers or doors that do not require a key for locking.


OPERATION – flexafunction™ feature provides choice of 90° or 180° cam turn. Cams are double punched for flexibility in mounting latch.

PACKAGING – Supplied with two cams, two stop washers, spur washer and mounting nut.

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	Case Quantity	Reference Number
* C8065-14A	Lipped, Overlay or Flush	5/8"	1/4"	25	M6-4540

* Not available with FlexaCam™

disc tumbler door & drawer locks

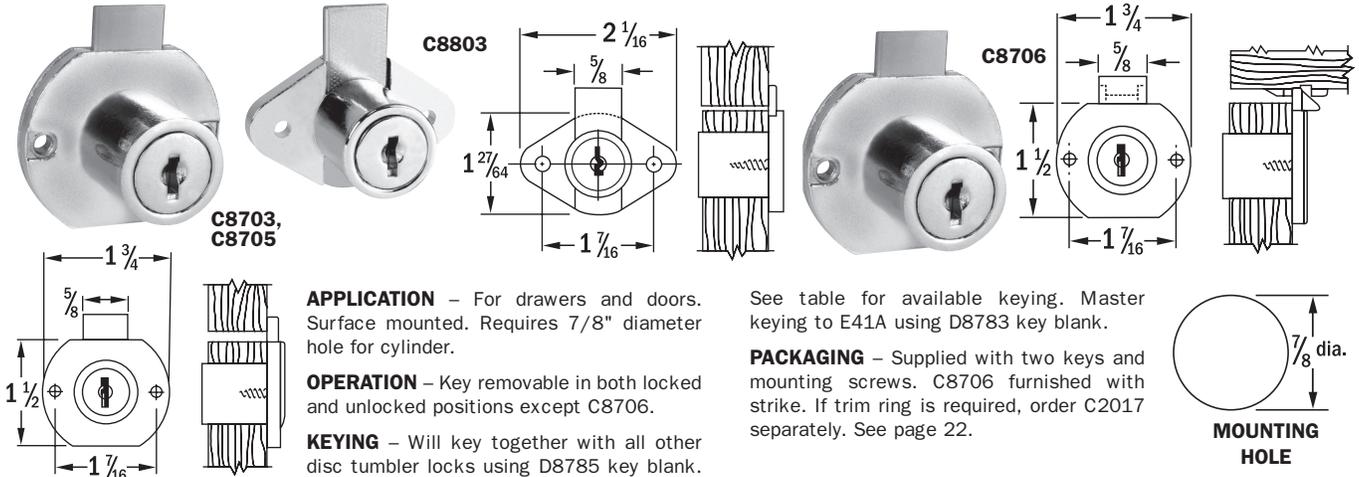


APPLICATION – For drawers and doors. Surface mounted. Requires 7/8" diameter hole for cylinder.

OPERATION – Key removable in both locked and unlocked positions except C8706.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank.

See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys and mounting screws. C8706 furnished with strike. If trim ring is required, order C2017 separately. See page 22.



Part No.	Installation	Bolt Type	Cylinder Length	Bolt Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Non MK Key Blank
						KD	MKKD			
C8703-14A	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-6707-170	D8785
C8703-3	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-6707-170	D8785
C8703-4G	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-6707-170	D8785
C8704-14A	Door	Dead	15/16"	11/32"	6	200	200	25	M4-6707-172	D8785
C8704-3	Door	Dead	15/16"	11/32"	6	200	200	25	M4-6707-172	D8785
C8704-4G	Door	Dead	15/16"	11/32"	6	200	200	25	M4-6707-172	D8785
C8705-14A	Drawer	Dead	1-3/16"	11/32"	3	200	200	25	M4-6707-171	D8785
C8705-3	Drawer	Dead	1-3/16"	11/32"	3	200	200	25	M4-6707-171	D8785
C8705-4G	Drawer	Dead	1-3/16"	11/32"	3	200	—	25	M4-6707-171	D8785
C8706-3	Drawer	Spring	15/16"	9/32"	3	200	—	25	M4-6708-170	D8785
C8803-14A	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-8803-001	D8785
C8803-3	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-8803-001	D8785
C8803-4G	Drawer	Dead	15/16"	11/32"	6	200	200	25	M4-8803-001	D8785


*Key Codes used: 3 Codes – C346A, C413A and C415A.
6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

disc tumbler gang lock



Cylinder is located near top of pedestal.

Saddle reverses for mortise application.




Additional 7/8" x 1/8" deep dado for bar required on inside of panel.

APPLICATION – For locking drawers in desk pedestals and other multiple drawer applications. Requires 7/8" diameter hole for cylinder and dado for bar, measuring 7/8" x 1/8" deep on inside of panel.

OPERATION – Key removable in both locked and unlocked positions. Turning the key locks all drawers simultaneously (drawers must be in closed position). Bar moves studs into notch in drawer or slide, thus preventing drawer movement.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys, three locking studs, three stud slides, saddle and mounting screws. If trim ring is required, order C2017 separately. See page 22.

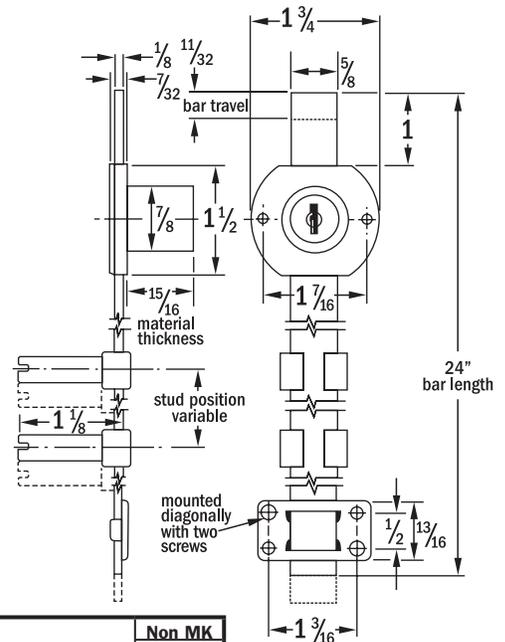


Part No.	Installation	Bar Operation	Cylinder Length	Bar Travel	KA* Codes	Key Changes		Case Quantity	Reference Number	Non MK Key Blank
						KD	MKKD			
D8090-14A	Desk Pedestals or Similar Multi-Drawer Conditions	Dead Locking	15/16"	11/32"	6	200	200	5	M4-6709-124	D8785
D8090-3			15/16"	11/32"	6	200	—	5	M4-6709-124	D8785
D8090-4G			15/16"	11/32"	6	200	—	5	M4-6709-124	D8785

*Key Codes used: 6 Codes – C346A, C390A, C413A, C415A, C420A and C642A.

disc tumbler furniture locks



Now an entire furniture locking system can be changed in a matter of minutes, not days, through flexible key control.

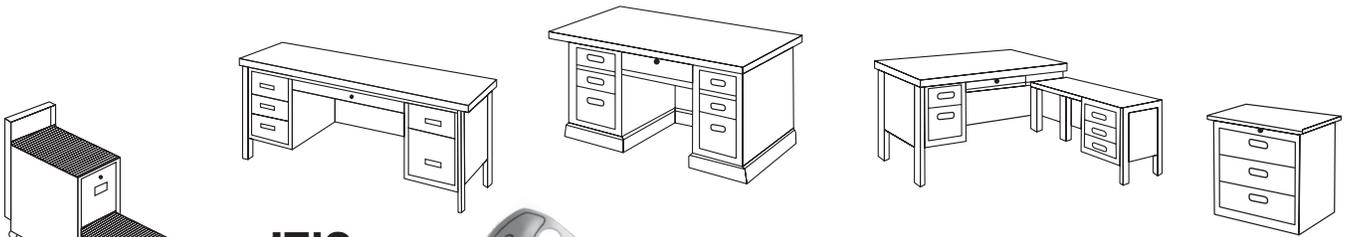

IT'S EASY!



D8779
Control Key

The D8779 control key allows the user to remove and install replacement lock cores (C8850) easily. For a complete list of replacement cores, see bottom of page.

SMALL DIAMETER FURNITURE LOCKS

LOCK CORE...

ONE PLUG FITS ALL!

D8840
Side Mounted Gang Lock

D8836
"Mini" Gang Lock

C8834
Drawer Lock

C8830, C8832
Cam Locks

D8838
Front Mounted Gang Lock

Housing assemblies and plug cores are packaged and sold separately. See pages 16 and 17.

plug core for furniture locks



Part No.	KA* Codes	KD Codes	Case Quantity	Key Blank
C8850-14A	20	200	25	D8783
C8850-3	20	200	25	D8783
C8850-19	20	200	25	D8783

*Key Codes used: D003A, D054A, D071A, D084A, D091A, D177A, D233A, D256A, D284A, D313A, D346A, D362A, D390A, D413A, D415A, D420A, D435A, D512A, D554A and D642A.

APPLICATION – One Plug Fits All for RemovaCore locks on furniture applications.

OPERATION – In all RemovaCore applications, key is removable in both locked and unlocked positions. D8779 control key is needed to remove and install lock cores (sold separately).



KEYING – All Cores are Master keyed to E13A. Will key together with all other disc tumbler locks using D8783 key blank, except C8051 and C8052. See table for available keying. KA to 20 changes, including all six standard disc tumbler codes.

PACKAGING – Supplied with two keys.

THESE LOCKS ALL FEATURE

REMOVAL CORE™

CAM LOCKS

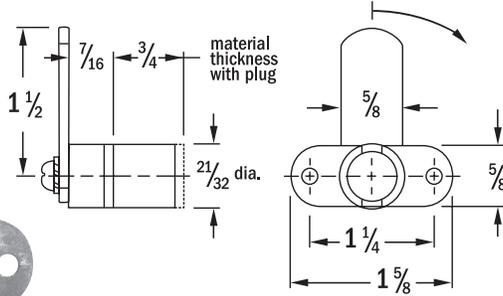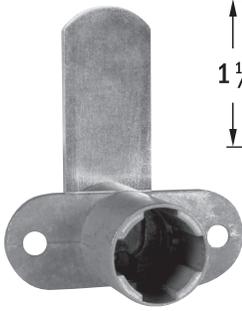


APPLICATION – For wood pedestals, door or drawer, R.H. or L.H. Surface Mounted. For flipper door use C7015 offset cam and C2003 strike. See pages 17 and 22.

OPERATION – Choice of 90° or 180° cam rotation, CCW to lock.

KEYING – Order core plug separately, C8850, see pg. 15.

PACKAGING – Housing assembly supplied with two mounting screws and straight cam. Housings are unplated.



C8830 (90°) Cam Lock
C8832 (180°) Cam Lock (shown)

Can also be used with pin cams. See page 17.


Use **C8850*** Core




Part No.	Description	Type of Installation	Cam Rotation	Lock Cylinder Length	Maximum Material Thickness	Case Quantity
C8830	Housing Assembly	Pedestal	90°	3/4"	3/4"	25
C8832	Housing Assembly	Pedestal	180°	3/4"	3/4"	25

* See page 15 for keying options.

SIDE MOUNTED TWO DRAWER "MINI" GANG LOCK

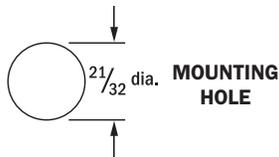


D8836 "Mini" Gang Lock

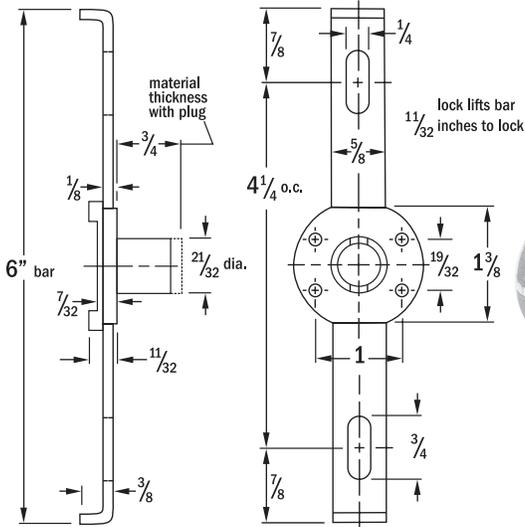

Use **C8850*** Core




DRAWER LOCK



C8834 Drawer Lock

Use **C8850** Core

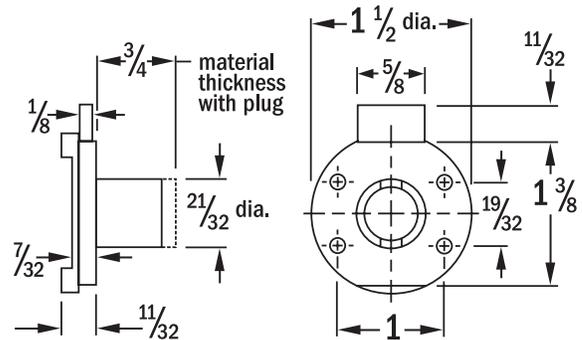

APPLICATION – Two drawer "Mini Gang" lock for desk or pedestals, and single locking drawer for desk or pedestals. Surface Mounted.

OPERATION – Key turn on the D8836 moves the 6" bar from above or below the plastic stops, which are mounted on drawer sides, thus preventing drawer movement. C8834 has a 11/32" bolt throw.

KEYING – Order core plug separately, C8850, see page 15.

PACKAGING – Housing assemblies supplied with four mounting screws and bolt. D8836 comes with two plastic stops and mounting screws. Housings are unplated.



Part No.	Description	Type of Installation	Bar/Bolt Operation	Lock Cylinder Length	Bar/Bolt Travel	Case Quantity
C8834	Housing Assembly	Single Drawer	Dead	3/4"	11/32"	25
D8836	Housing Assembly	Desk Pedestals on two drawer applications	Dead Locking	3/4"	11/32"	10

* See page 15 for keying options.

disc tumbler furniture locks



GANG LOCKS WITH

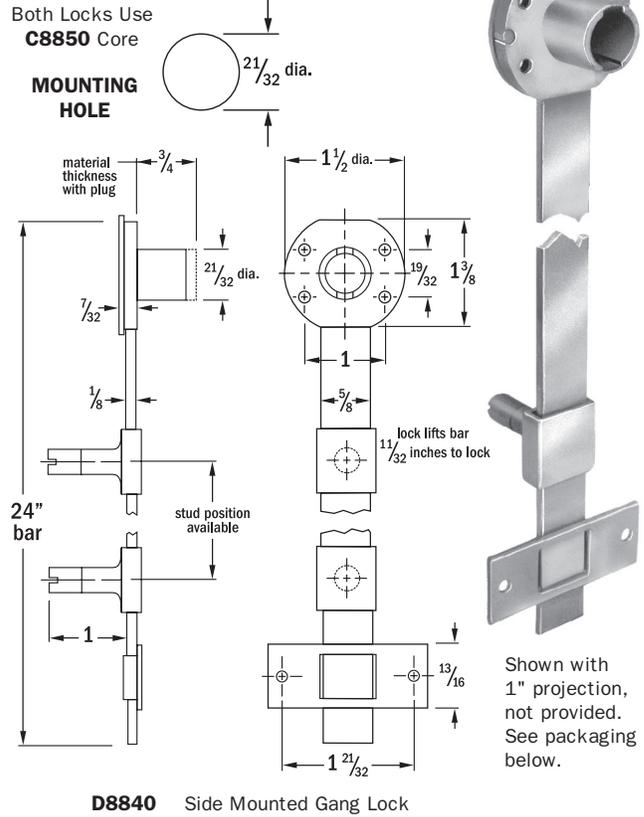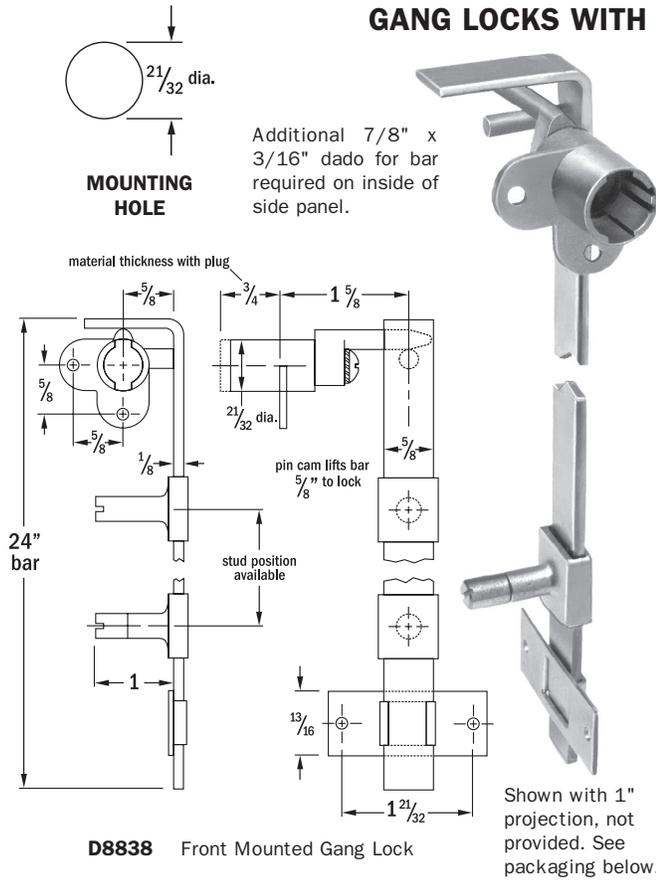

APPLICATION – For locking drawers in desk pedestals and other multiple drawer applications. Lock mounts in right corner. Can also be mounted for left corner application. Surface mounted. Requires 21/32" diameter hole for cylinder, and when required, a dado for bar, measuring 7/8" x 3/16" deep in inside of panel.

OPERATION – Turning the key locks all drawers simultaneously (drawers must be in closed position). Bar moves studs from above or below the plastic stops, which are mounted on drawer sides, thus preventing drawer movement.

KEYING – Order core plug separately, C8850, see page 15.

PACKAGING – Housing assembly supplied with three set screws for 1/2" projection, three slides, saddle, three plastic stops, and mounting screws. If 1" projection is required, order locking studs separately.

APPLICATION – For locking drawers in desk pedestals and other multiple drawer applications. Lock mounts on inside of unit. Surface mounted. Requires 21/32" diameter hole for cylinder.

OPERATION – Turning the key locks all drawers simultaneously (drawers must be in closed position). Bar moves studs from above or below the plastic stops, which are mounted on drawer sides, thus preventing drawer movement.

KEYING – Order core plug separately, C8850, see page 15.

PACKAGING – Housing assembly supplied with three set screws for 1/2" projection, three slides, saddle, three plastic stops, and mounting screws. If 1" projection is required, order locking studs separately.

Part No.	Description	Type of Installation	Bar Operation	Lock Cylinder Length	Bar Travel	Case Quantity
D8838	Housing Assembly	Desk Pedestal & Multi-Drawer applications	Dead Locking	3/4"	5/8"	5
D8840	Housing Assembly		Dead Locking	3/4"	11/32"	5

accessories

Part No.	Description	Dimensions	Material	Bag Quantity
C2018-19	Trim Ring	21/32" diameter	Plastic	25
C7015-2C	5/16" Offset Cam	1-1/16 to hook	Steel	25
C7020-2C	Pin Cam	1"	Die Cast	25
C7021-2C*	Pin Cam	1-1/2"	Die Cast	25
C7022-2C*	Pin Cam	1-7/8"	Die Cast	25

Fits 17mm Hole



C2018



C7020



C7021*



C7022*



C7015

Must order longer screw part number P5-1111-353


Note: Order by number of pieces, not by bag. Full bags only.

Orders must be in multiples of 25 pieces.

* Will not work with D8838.

disc tumbler central locking systems

For convenience, we have gathered together in one package all components, fasteners and installation guidelines to provide security for three typical wood office furniture applications.

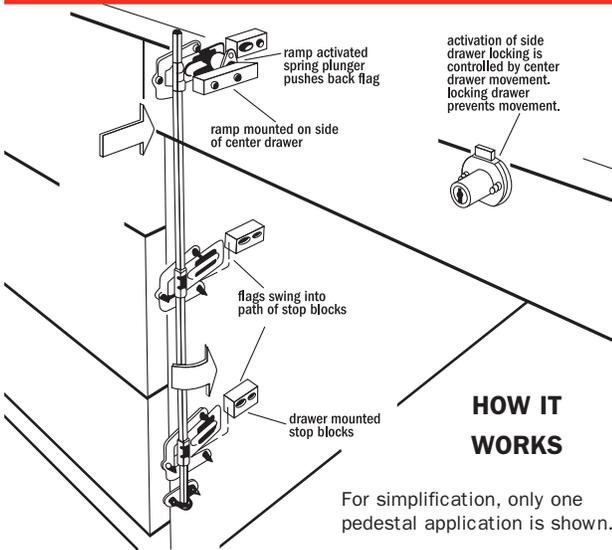

CENTER DRAWER LOCKING


APPLICATION – For installing in wood desks with center drawer and up to six side drawers, three per pedestal. Drawer lock is installed in center drawer.

OPERATION – Movement of the center drawer operates the system. When center drawer is closed, the closing motion is transferred to the pedestals via mounted ramps. Flags are pivoted into the path of side drawer mounted stops preventing opening of side drawers.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys and all components shown and necessary mounting screws. See installation sheet for complete parts listing.

Part No.	Bolt Type	Cylinder Length	Bolt Throw	KA* Codes	KD Changes	Case Quantity	Non MK Key Blank
D8950-3	Dead	15/16"	11/32"	1	100	5	D8785
D8950-4G	Dead	15/16"	11/32"	1	100	5	D8785

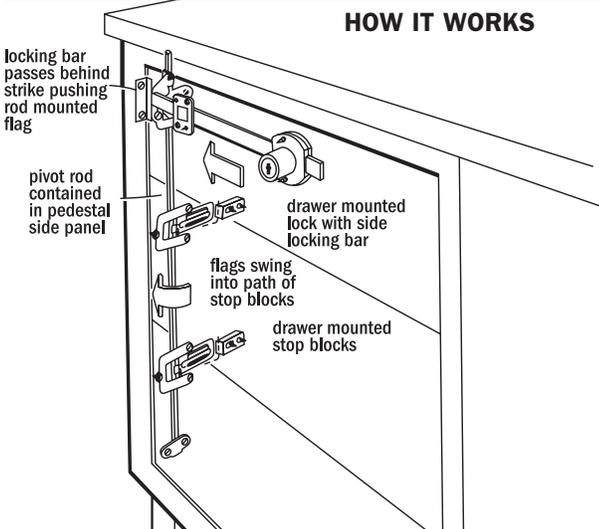

PEDESTAL LOCKING


APPLICATION – For multiple drawer locking of wood desk pedestal only or mobile pedestal unit. Bar lock is installed in top drawer. For inside case width up to 15-1/2".

OPERATION – Locking the top drawer rotates rod with attached flags which pivot into path of drawer mounted stops preventing opening of lower drawers.

KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys and all components shown and necessary mounting screws. See installation sheet for complete parts listing.

Part No.	Bar Operation	Cylinder Length	Bolt Throw	KA* Codes	KD Changes	Case Quantity	Non MK Key Blank
D8951-3	Reversible	15/16"	11/32"	1	100	5	D8785
D8951-4G	Reversible	15/16"	11/32"	1	100	5	D8785

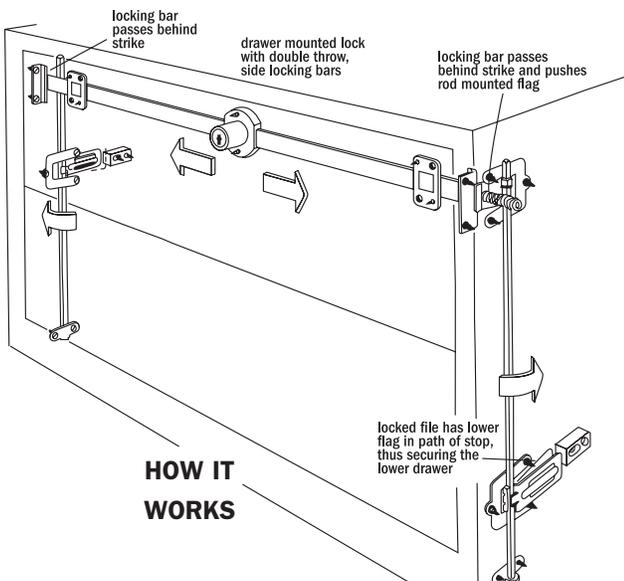

LATERAL FILE LOCKING

APPLICATION – For wood constructed two drawer lateral files with inside case width up to 42". Double throw bar is installed in top drawer.

OPERATION – Once current inventory is depleted, the D8952 will not include the "anti-tilt" components. The D8952 will only include components for central locking. If anti-tip is needed, consider the CompX Timberline System 400 for two-drawer lateral files. This permits only one drawer at a time to be opened. For more information on the System 400, refer to CompX Timberline STOCK LOCKS catalog page 6. D8952 does NOT include System 400.


KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying. Master keying to E41A using D8783 key blank.

PACKAGING – Supplied with two keys and all components shown and necessary mounting screws. See installation sheet for complete parts listing.

Part No.	Bar Operation	Cylinder Length	Bolt Throw	KA* Codes	KD Changes	Case Quantity	Non MK Key Blank
D-8952-3	Double throw	15/16"	11/32"	1	100	5	D8785
D8952-4G	Double throw	15/16"	11/32"	1	100	5	D8785

*Key Codes used: 1 Code – C415A.

furniture locks

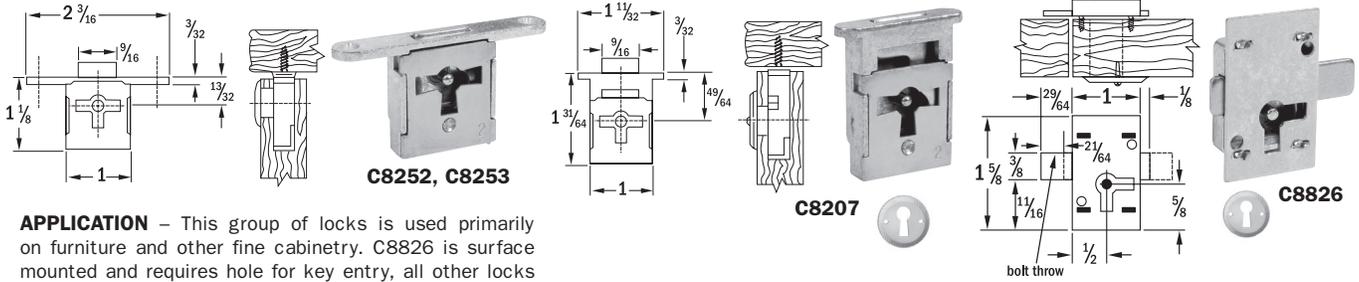

APPLICATION – This group of locks is used primarily on furniture and other fine cabinetry. C8826 is surface mounted and requires hole for key entry, all other locks require full 11/32" x depth of lock. Additional mortising, required for lock selvedge plus hole for key entry.

OPERATION – Key removable in both locked and unlocked positions.

KEYING – Each lock furnished keyed alike.

PACKAGING – Supplied with one key. All locks except C8826 are supplied with strikes. Key hole escutcheons are packed with C8207 and C8826.

Part No.	Installation	Bolt Type	Bolt Travel	Case Quantity	Reference Number	Key Blank
C8207-3	R.H. Door, Drawer,	Dead	3/16"	25	N0-0274-001	D8890
C8252-3	Full Mortise	Dead	3/16"	25	N0-0252-001	D8890
C8253-3	L.H. Door, Full Mortise	Dead	3/16"	25	N0-0252-002	D8890
C8826-3	Door/Drawer, Surface Mounted	Dead	21/64"	25	N0-0826-001	D8890

chest/lid locks



APPLICATION – Lid locks for cedar chest application and other lid locking requirements. C8414 is surface mounted and requires a 9/16" diameter hole for cylinder. C8384 requires 11/32" wide x depth of lock full mortise plus mortise for selvedge plus hole for key entry.

OPERATION – Key removable in both locked and unlocked positions. C8414 has a safety feature requiring operation of pushbutton to lock or latch lid closed.

KEYING – Each lock furnished keyed alike.

PACKAGING – Supplied w/ one key. Appropriate strikes & mounting screws supplied w/locks w/additional keyhole escutcheon furnished w/C8384.

Part No.	Installations	Bolt Type	Cylinder Length	Bolt Travel	Case Quantity	Reference Number	Key Blank
C8384-3	Chest Lid, Full Mortise	Hook	—	5/16" .200" side shift	25	N0-0384-001	D8890
C8414-4G	Chest Lid, Surface Mounted	Internal, Engages Strike	7/8"	—	25	N0-8414-001	D8194

DUAL Access by Compx – keyless combination cam lock



APPLICATION – For drawers, R.H. or L.H. doors with flush or overlay construction, Requires 3/4" diameter mounting hole.





OPERATION – Can be operated using a combination or a key. Once unlocked, rotate the housing 90° clockwise to unlatch. Unlock using combination: turn wheels until correct combination appears in the combination windows. Press button and rotate clockwise to unlock. To lock scramble the wheels on the dial. Unlock using key: Insert key and rotate 90°, rotate housing to unlock. To lock, user must rotate the key 90° counter-clockwise to lock.

KEYING – Will key together with all other disc tumbler locks using D8770. Master keying is standard.




PACKAGING – D8030 supplied with two keys, mounting nut, 4-prong wood anchor, (1) 2" length straight cam, (1) 2" length with 7/32" offset cam. D8031 supplied with two keys, mounting nut, 4-prong wood anchor, (1) 2" length straight cam, (1) 2" length with 7/32" offset cam, (1) 2" length with 19/32" offset cam.

Part No.	Cylinder Length	Maximum Material Thickness	MKKA Codes*	MKKD Codes	Case Qty.	Key Blank	Plug Removal Key	Master Key
D8030	7/8"	5/8"	3	60	10	D8770	D8771	D8772
D8031	1 3/8"	1 1/8"	3	60	10	D8770	D8771	D8772

* Key Codes: DA108, DA120, DA124

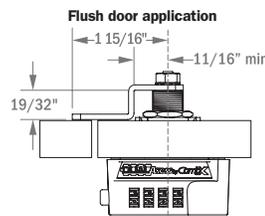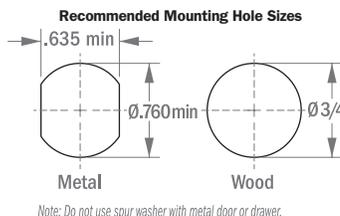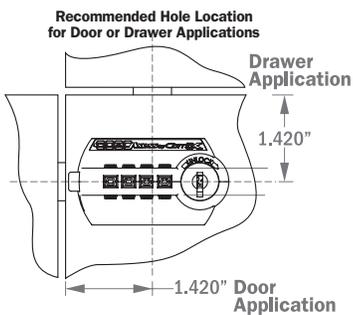

disc tumbler handle locks

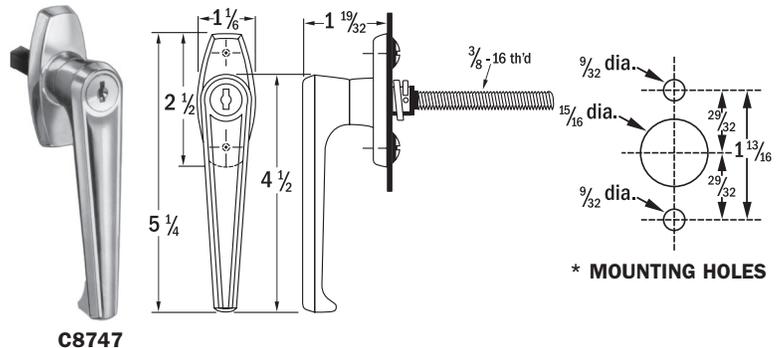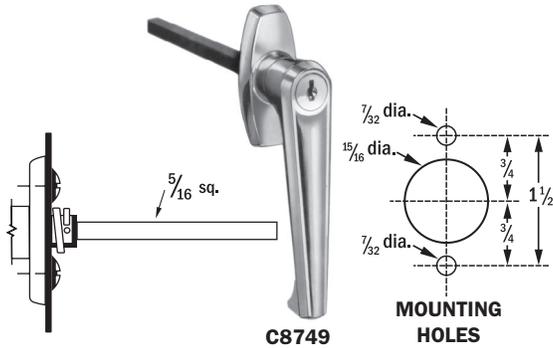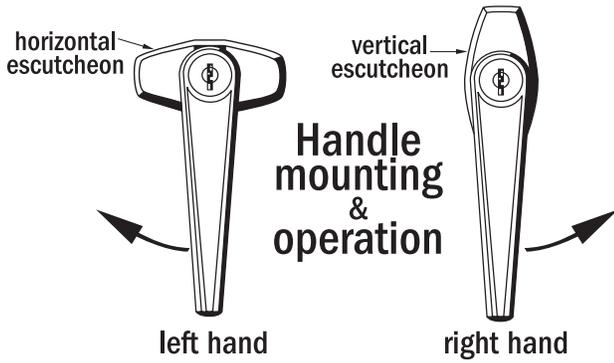


* MOUNTING HOLES

APPLICATION – For doors on metal lockers and cabinets. For R.H. doors, install with escutcheon vertical. For L.H. doors, install with escutcheon horizontal. See above drawings. Choice of spindle lengths and mounting. Spindles accept both C8756 latch plate and C8757 tongue except C8747 which has 8-32 tapped end hole and C8749 which will accept only the C8757 tongue. Spindles can be cut to fit special requirements.

OPERATION – Key removable in both locked and unlocked positions.


KEYING – Will key together with all other disc tumbler locks using D8785 key blank. See table for available keying.

PACKAGING – Supplied with two keys (except C8755) and mounting hardware.

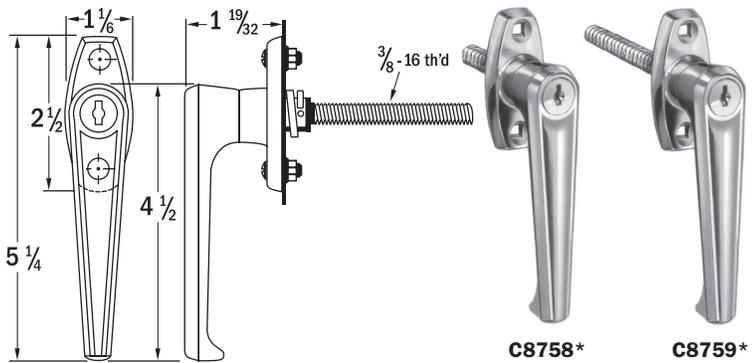

Part No.	Type of Mounting	Spindle Length	Direction of Turn to Open	KA* Codes	Key Changes KD	Case Quantity	Reference Number	Non MK Key Blank
C8747-26D	Rear	1" **	90° c/cw	1	200	10	M4-0428-420	D8785
C8749-26D		4" †	90° c/cw	1	200	10	M4-0428-293	D8785
C8751-26D		1"	90° c/cw	3	200	10	M4-0428-620	D8785
C8754-26D		3"	90° c/cw	3	200	10	M4-0428-684	D8785
C8755-26D††		3"	90° c/cw	—	—	10	M6-0429-684	—
C8758-26D	Through the	1"	90° c/cw	3	200	10	M4-0294-620	D8785
C8759-26D	Escutcheon	3"	90° c/cw	3	200	10	M4-0294-684	D8785


*Key Codes used: 1 Code – C415A. †5/16" sq. spindle
 3 Codes – C413A, C415A and C420A. ††Non-Locking Handle.
 **5/16" sq. spindle w/ 8-32 tapped end hole.

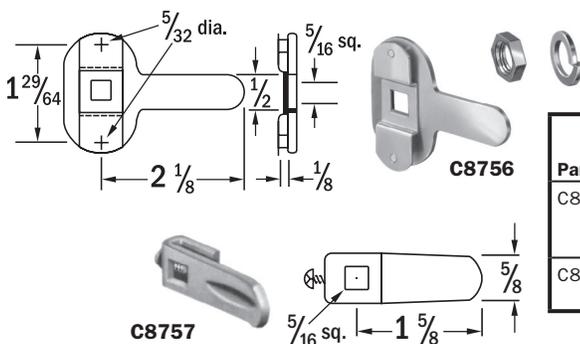


LATCH PLATE & TONGUE FOR ABOVE HANDLE LOCKS

Part No.	Description	Method of Attachment to Spindle	Case Quantity	Reference Number
C8756-2C	3 Point Latch Plate with Tongue, Used with Locking Bars	Hex Nuts with Lock Washers Threaded on Spindle	25	M3-6931-001
C8757-2C	Single Point Latch Tongue	Side Mounted Set Screw	25	H2-0082-003

new! padlockable cam lock

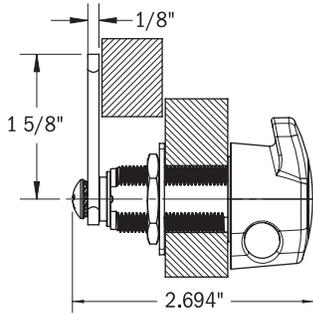

MOUNTING HOLES FOR CYLINDER CAM LOCKS

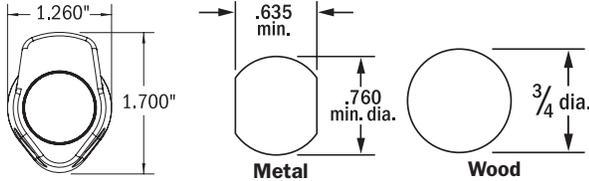

The C8010 can accept padlocks with shackle up to 3/8" in diameter (5/16" shackle is recommended).


APPLICATION – For cabinet doors or drawers, lockers, anywhere padlocks are used. For overlay application, the combined thickness of front and frame cannot exceed the cylinder length.

OPERATION – Choice of either 90° clockwise or counterclockwise using rotation stop.


PACKAGING – Supplied with FlexaCam spacers, mounting plate for wood installation, one cam, detent washer, one rotation stop and mounting hardware. **Padlock NOT included.**

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	Case Quantity
C8010-14A (bright nickel)	Lipped/ Overlay or Flush	1-7/16"	1-1/8"	10
C8010-15 (brushed satin nickel)		1-7/16"	1-1/8"	10
C8010-18 (matte black)		1-7/16"	1-1/8"	10

C8010 features **FlexaCam™** 3/16" 1/8" 1/16"
Three spacers offer three thicknesses – add to cam for up to three additional latching points. **U.S. Patent No. 9,512,653.**



disc tumbler circuit breaker cabinet locks

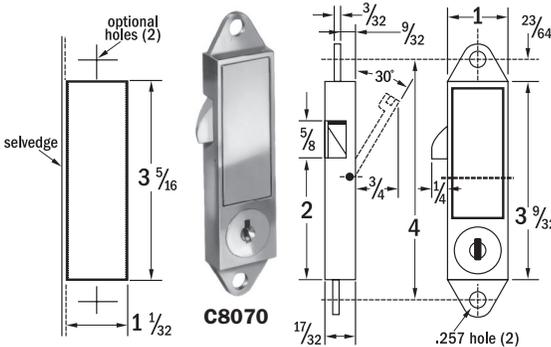

APPLICATION – For right handed metal doors of electrical circuit breaker cabinets.

OPERATION – Key removable in both locked and unlocked positions. Push plate operates spring bolt. Unlocked, push plate acts as spring latch.


KEYING – Supplied keyed alike only to B135A.

PACKAGING – Supplied with two keys; no mounting hardware.

Part No.	Type of Mounting	Bolt Type	Bolt Travel	Case Quantity	Reference Number	Key Blank
C8070-2C*	R.H. Door	Spring Pivot	7/32"	10	M4-0226-001	D8786

*Aluminum Enamel Finish.

garage door locking mechanism



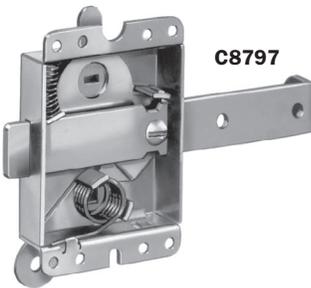


APPLICATION – For mounting on sectional over head doors. Factory assembled for R.H. mounting. Mechanism installs at right side of door (inside garage) to lock into track. Handle can replace Overhead Door locking handles. Mechanism can be reversed for L.H. application.

PACKAGING – Furnished with mounting screws.

Part No.	Installation	Operation	Key Changes	Case Quantity	Reference Number	Key Blank
C8797-2C	Inside door near track	Sliding bolt locks into track	—	5	M6-0492-001	—

cooler locking handle replacement plugs

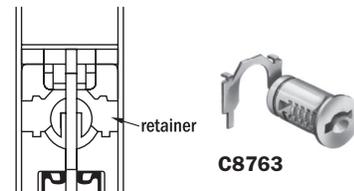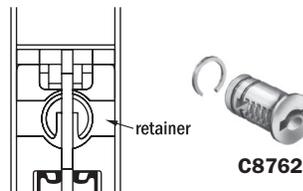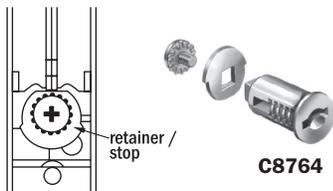

APPLICATION – C8762 and C8763 replacement plugs are for earlier models of C8765 locking handles (National Lock 59-1105 series of handles).


OPERATION – Key removable in both locked and unlocked positions.

KEYING – Keyed alike to XC-3.

PACKAGING – C8762 and C8763 plugs supplied with two keys and specific retainer. C8764 plug supplied with two keys, retainer/stop and screw.

Part No.	Installation	Case Quantity	Key Blank
C8764-26	Current C8765 Handles	25	D8780
C8763-26	N.L. 59-1105 Handles	25	D8780
C8762-26	Early Models, N.L. 59-1105 Handles	25	D8780

double drawer strike

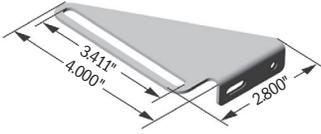

Part No.	Description	Qty. per bag
C500SP	Designed to lock file and box drawers when no other locking points are available.	25

strikes, escutcheon, flat washer

Our most popular strikes are offered in two finishes. They are furnished with screws finished to match the strike.



C2001



C2002



C2003



C2004



C2005



C2006



C2007



C2008

Ornamental escutcheon for furniture. Supplied with mounting pins.



C2009



C2014 NEW!

Cam lock mounting plate with single mounting screw hole



C2015

Flat washer used to convert 3/4" diameter holes in steel fronts to a double "D" hole for installing cam locks. Spot weld to backside of hole.



C2016

Mounting plate for cylinder cam locks, screw mounted. Used where spur washer will not embed into hard surface. Packed 25 pcs. per bag.



C2017

7/8" diameter trim ring to be used to cover ragged edges around bored mounting holes.

Part No.	Description	Overall Dimensions	Quantity Per Bag
C2001-14A	Formed strike, no bolt hole	1-3/4" x 1/2" with 3/16" form	25
C2001-3			25
C2002-14A	Formed strike, no bolt hole countersunk holes reversed	1-3/4" x 1/2" with 3/16" form	25
C2002-3			25
C2003-14A	Flat strike with rounded ends, 3/4" x 7/32" bolt hole	1-15/16" x 3/8"	25
C2003-3			25
C2004-14A	Flat strike with square ends, 7/8" x 17/64" bolt hole	2-5/32" x 1/2"	25
C2004-3			25
C2005-14A	Flat strike, no bolt hole	1-15/16" x 3/8"	25
C2005-3			25
C2006-14A	Flat strike with sq. ends and 15/16" x 1/4" tongue, 15/16" x 1/4" hole	2" x 3/4"	25
C2006-3			25
C2007-14A	Flat strike with rounded ends, 1-1/16" x 17/64" bolt hole	2-5/32" x 1/2"	25
C2007-3			25
C2008-3	Key hole escutcheon	1" Diameter	50
C2009-14A	Die-cast strike with countersunk holes	1-3/4" x 1/2"	25
C2014-2C	NEW! Cam lock mounting plate	1.39" x 1.25"	25
C2015-2C	Flat washer for cam locks	1-1/8" Diameter	25
C2016-2C	Mounting plate for cam locks. Screw mounted, use No. 8 screws, not furnished.	2-3/16" x 1-1/4"	25
C2017-14A	Trim ring for all locks with a 7/8" mounting hole.	7/8" Diameter	25
C2017-26D			25
C2017-3			25
C2017-4			25
C2017-4G			25

Note: Order by number of pieces, not by bag. Full bags only. Orders must be in multiples of 25 or 50 pieces.

heavy-duty cam for mailbox locks




C7120

Part No.	Description	Overall length	Offset	Cam Thickness	Qty. per bag
C7120	Heavy-duty cam designed for use exclusively with C9100 and C9200 postal locks. .317" mounting hole.	2-1/4"	1/4"	3/16"	5


disc tumbler reversible key cam locks



C8062



OVERLAY



FLUSH

APPLICATION – For drawers, R.H. or L.H. doors with overlay (straight cam) or flush (formed cam) construction. For overlay application, the combined thickness of front and frame cannot exceed the 7/8" cylinder length. See page 12 for mounting hole detail.

OPERATION – 90° cam turn. Key removable in both locked and unlocked positions.

KEYING – Reversible key operation. Keyed to SK Series; does not key with other disc tumbler locks in this catalog. See table for available keying.


PACKAGING – Supplied with two keys, spur washer (for wood), mounting nut and two cams. If flat washer (for metal) is needed, order C2015-2C separately. See above.

Lock furnished with straight cam assembled.

Part No.	Type of Mounting	Cylinder Length	Maximum Material Thickness	KA* Codes	Key Changes KD	Case Quantity	Reference Number	Key Blank
* C8062-14A	Overlay or Flush	7/8"	9/16"	1 SK1	100	25	M4-0300	D8777

* Not available with FlexaCam™

disc tumbler cams

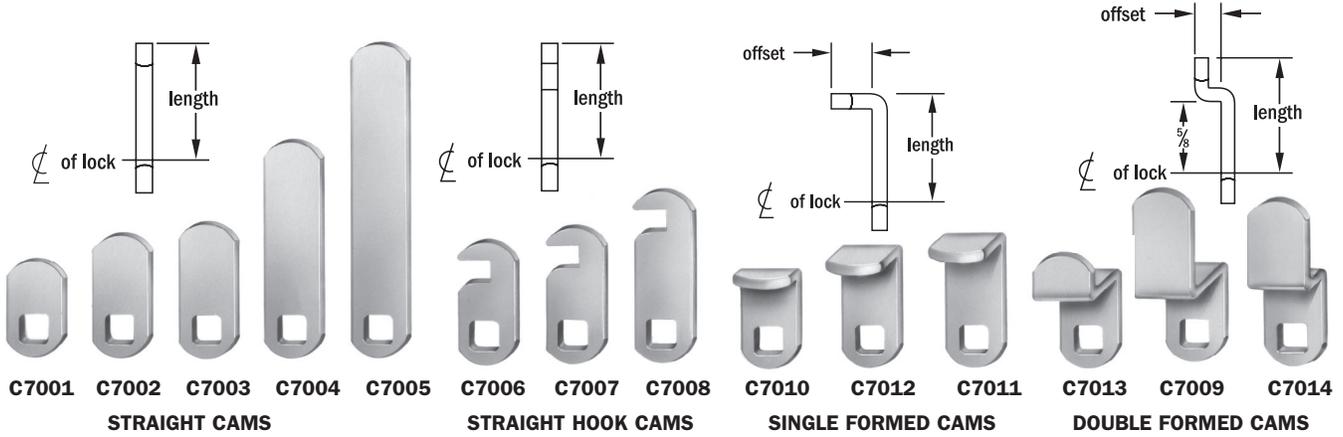

.284" mounting hole for all disc tumbler cams

Cams are .095" thick and .625" wide.


Selection of cams that permit adaption of disc tumbler cylinder cam locks to meet nearly every application need.

Hook Cams and Double Formed Cams can be reversed when required.

Part No.	Description	Length	Quantity Per Bag	Part No.	Description	Length	Offset	Quantity Per Bag
C7001-2C	Straight Cam	3/4"	25	C7008-2C	Straight Hook Cam	1-1/2"	—	25
C7002-2C	Straight Cam	1"	25	C7009-2C	Double Formed Cam	1-3/4"	1/2"	25
C7003-2C	Straight Cam	1-1/8"	25	C7010-2C	Single Formed Cam	5/8"	7/32"	25
C7004-2C	Straight Cam	2"	25	C7011-2C	Single Formed Cam	1-1/8"	7/16"	25
C7005-2C	Straight Cam	3"	25	C7012-2C	Single Formed Cam	1"	7/16"	25
C7006-2C	Straight Hook Cam	1"	25	C7013-2C	Double Formed Cam	1-1/8"	3/8"	25
C7007-2C	Straight Hook Cam	1-1/8"	25	C7014-2C*	Double Formed Cam	1-5/8"	5/16"	25


*For overlay construction using 3/4" thick front and 3/4" thick frame material. Use with C8053 disc tumbler lock.

pin tumbler cams

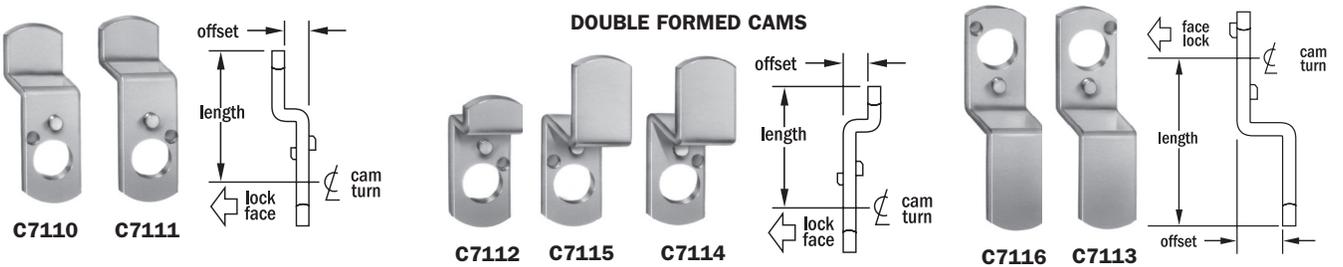

Cams for pin tumbler cylinder cam locks. All cams have dual function. See "Applications" column in table for details.

Cams are .095" thick and .625" wide.

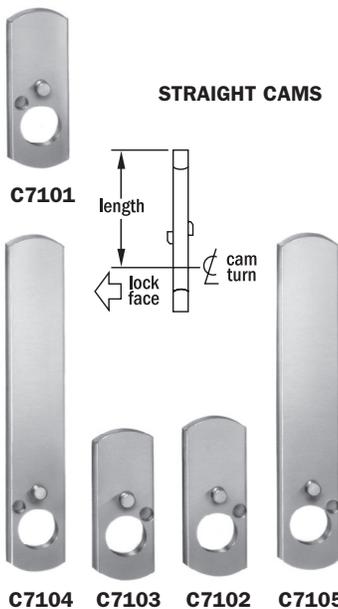

Applications: solid lines show locked position of cam	Position of shifter on back of lock	Part Number	Description	Length	Offset	Quantity Per Bag
		C7101-2C	Straight Cam	1-1/4"	—	20
		C7104-2C	Straight Cam	3"	—	20
		C7110-2C	Double Formed Cam	1-1/4"	9/32"	20
		C7115-2C*	Double Formed Cam	1-5/8"	7/16"	20
		C7112-2C	Double Formed Cam	1-1/8"	1/4"	20
		C7114-2C*	Double Formed Cam	1-5/8"	7/16"	20
		C7113-2C*	Double Formed Cam	1-5/8"	7/16"	20
		C7116-2C*	Double Formed Cam	1-5/8"	7/16"	20

*For overlay construction using 3/4" thick front and 3/4" thick frame material. Use with C8102 pin tumbler locks.

Note: Order by number of pieces, not by bag. Full bags only. Orders must be in multiples of 25 or 20 pieces.

original pin tumbler key blanks

IDENTIFYING KEY BLANKS

Blanks are listed with related actual size cross section.



Sight down the end of the blank to identify the cross section or profile.

PIN TUMBLER BLANKS

- 3 Pin Tumbler
D4290 
- 4 Pin Tumbler
D4291 
- 5 Pin Tumbler
D4292 
- 5 Pin Tumbler
D4293 

4 PIN TUMBLER BLANKS




5 PIN TUMBLER BLANK



Part No.	Description	Material	Carton Quantity	Reference Number
D4290	3 Pin Tumbler	Brass	50	M3-0679-111
D4291	4 Pin Tumbler	Brass	50	M3-0558-111
D4292	5 Pin Tumbler	Brass	50	M3-0676-111
D4293	5 Pin Tumbler	Brass	50	M3-0676-211
D4295	5 Pin Tumbler	Brass	50	M3-0600-111
D4296	4 Pin Tumbler (short)	Brass	50	M3-5655-111
D4297	4 Pin Tumbler (long)	Brass	50	M3-5450-212

original disc tumbler key blanks

4 DISC TUMBLER BLANKS

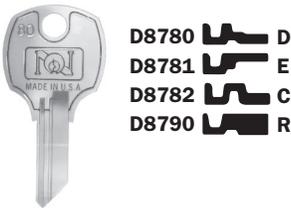

- D8780  D
- D8781  E
- D8782  C
- D8790  R

5 DISC TUMBLER BLANKS



- D8783  D
- D8784  E
- D8785  C
- D8786  B
- D8791  R
- D8792  N
- D8793  M
- D8794  K

6 DISC TUMBLER BLANKS



- D8787  D
- D8788  E
- D8789  C
- D8795  N
- D8796  M
- D8798  K

5 or 6 DISC TUMBLER REVERSIBLE KEY BLANKS



D8777



D8778




D8776

Part No.	Description	Material	Carton Quantity	Reference Number
D8776	5 Disc Tumbler Pass Key	Brass	50	P5-6613-301
D8777	5 or 6 Disc Tumbler Pass Key	Brass	50	M5-0650-111
D8778	5 or 6 Disc Tumbler Pass Key	Brass	50	M5-0650-906
D8780	4 Disc Tumbler Pass Key	Brass	50	M5-0682-111
D8781	4 Disc Tumbler Master Key	Brass	50	M5-0682-112
D8782	4 Disc Tumbler Pass Key	Brass	50	M5-0688-111
D8790	4 Disc Tumbler Pass Key	Brass	50	M5-0693-111
D8783	5 Disc Tumbler Pass Key	Brass	50	M5-0680-111
D8784	5 Disc Tumbler Master Key	Brass	50	M5-0680-112
D8785	5 Disc Tumbler Pass Key	Brass	50	M5-0687-111
D8786	5 Disc Tumbler Pass Key	Brass	50	M5-0691-111
D8787	6 Disc Tumbler Pass Key	Brass	50	M5-0694-117
D8788	6 Disc Tumbler Master Key	Brass	50	M5-0694-119
D8789	6 Disc Tumbler Pass Key	Brass	50	M5-0694-115
D8791	5 Disc Tumbler Pass Key	Brass	50	M5-0692-111
D8792	5 Disc Tumbler Pass Key	Brass	50	M5-0695-114
D8793	5 Disc Tumbler Pass Key	Brass	50	M5-0695-112
D8794	5 Disc Tumbler Master Key	Brass	50	M5-0695-113
D8795	6 Disc Tumbler Pass Key	Brass	50	M5-0694-113
D8796	6 Disc Tumbler Pass Key	Brass	50	M5-0694-112
D8798	6 Disc Tumbler Master Key	Brass	50	M5-0694-114

All Disc Tumbler Key Blanks, D8780 through D8798, are stamped with last two digits of part number to aid in identification. Example: D8788 is stamped "88".

original lever tumbler key blanks

FLAT LEVER TUMBLER BLANKS

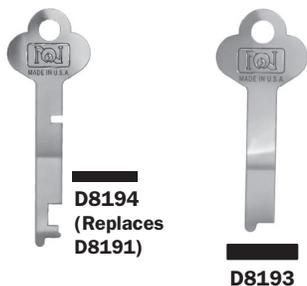


Part No.	Description	Material	Carton Quantity	Reference Number
D8194	Lever Tumbler (cut) – Flat	Steel	50	N1-8414-105
D8193	Lever Tumbler Blank – Flat	Steel	50	N1-0656-113

mail box key blanks



Part No.	Description	Material	Quantity
D4291	Use with C8710-C8735 mailbox locks	Brass	50/box
D4300	Key Codes used: 1000PS-1999PS, 3000PS-3999PS	Brass	50/box
D4301	Key Codes used: 2000PS-2999PS, 4000PS-4999PS	Brass	50/box
D4400	Use with C9300, C9400, C9500 mailbox locks	Brass	10/bag

original master keys

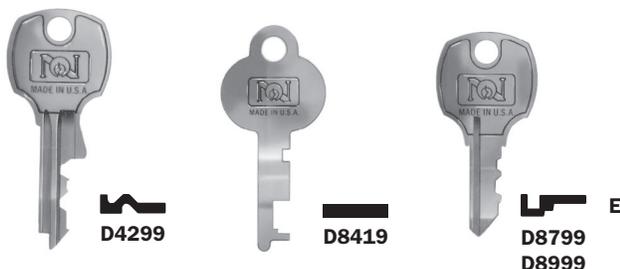

Part No.	Description	Material	Reference Number
D4299	Pin Tumbler GM1 Master key	Brass	M3-0686-399
D8419	Lever Tumbler 5LM Flat Master key	Steel	N1-0651-399
D8799	Disc Tumbler E41A Master key	Brass	M5-0680-399
D8999	Disc Tumbler E13A Master key	Brass	M5-0680-399

keys

FREEZER LOCK KEYS



WARDED BARREL KEY




Part No.	Description	Material	Carton Quantity	Reference Number
D8590	Freezer Lock Key Wrench – Cross Shape	Die Cast	50	N5-0811-001
D8591	Freezer Lock Key Wrench – Pentagon Shape	Die Cast	50	N5-0812-001
D8890	Warded Barrel Key	Die Cast	50	M5-0689-102


key code books

D8001 Pin Tumbler Key Codes

Includes the most popular National key codes: GM1 series, GM2 series, GM2A series, GM300 series, GM600 series and GM700 series.

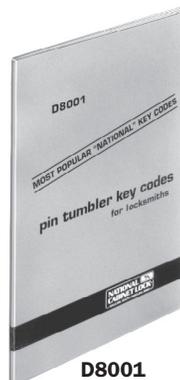

D8001

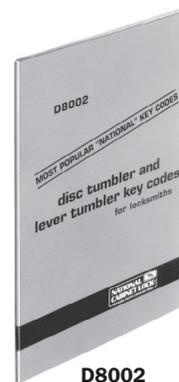

D8002

D8002 Disc Tumbler and Lever Tumbler Key Codes

Includes the most popular National key codes: standard 4 tumbler series, standard 5 tumbler series, standard 6 tumbler series, 5 tumbler prefix RD series, 5 tumbler prefix GF series, 5 tumbler prefix SK and KS series, 6 tumbler prefix SK and KS series and 5 lever tumbler series 8LLT.

keying kits



V70P-1



V70P-2



V71D-3



V71D-4

V70P-1 Pin Tumbler Keying Kit – Includes:

- 100 Pcs. ea. 1, 2, 3 and 4 Drivers.
- 100 Pcs. ea. 0, 1, 2, 3, 4, 5, 6, 7, 8 and 9 Tumblers.
- 250 Pcs. Tumbler Springs
- 100 Pcs. Tumbler Retainers
- 50 Pcs. ea. C3735 and C3738 Plug Retainers.

V70P-2 Pin Tumbler Master Keying Kit – Includes:

- 100 Pcs. ea. 2, 3, 4, 5, 6, 7, 8 and 9 Master Drivers.


V71D-3 Disc Tumbler Keying Kit – Includes:

- 100 Pcs. ea. 00, 22, 44 and 66 Tumblers.
- 250 Pcs. Tumbler Springs.

V71D-4 Disc Tumbler Master Keying Kit – Includes:

- 100 Pcs. ea. 02, 04, 06, 20, 24, 26, 40, 42, 46, 60, 62 and 64 Tumblers.
- 250 Pcs. Tumbler Springs.


keying kit replacement parts

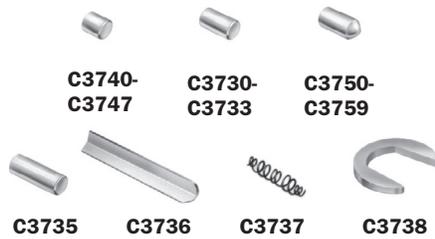

PIN TUMBLER KEYING KIT REPLACEMENT PARTS



DISC TUMBLER KEYING KIT REPLACEMENT PARTS

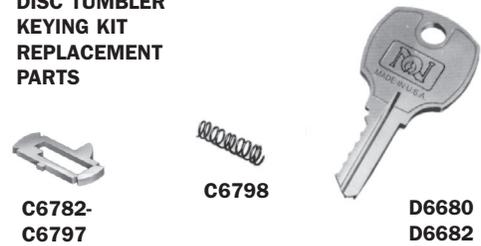

Part No.	Description	Identifying Color	Quantity Per Bag	Part No.	Description	Quantity Per Bag
C3730	#1 Driver	Blue	250	D6676	5 Pin Tumbler Depth Keys – Set of 10 Keys	1 Set
C3731	#2 Driver	Slate Gray	250	D6680	5 Disc Tumbler Depth Keys – Set of 4 Keys	1 Set
C3732	#3 Driver	Copper	250	D6682	4 Disc Tumbler Depth Keys – Set of 4 Keys	1 Set
C3733	#4 Driver	Violet	250	D6686	4 Pin Tumbler Depth Keys – Set of 10 Keys	1 Set
C3735	Plug Retainer	—	100	C6782	#00 Tumbler	250
C3736	Tumbler Retainer	—	100	C6783	#22 Tumbler	250
C3737	Tumbler Spring	—	500	C6784	#44 Tumbler	250
C3738	Plug Retainer	—	100	C6785	#66 Tumbler	250
C3740	#2 Master Driver	Violet	250	C6786	#02 Tumbler	250
C3741	#3 Master Driver	Red	250	C6787	#04 Tumbler	250
C3742	#4 Master Driver	Blue	250	C6788	#06 Tumbler	250
C3743	#5 Master Driver	Fuchsia	250	C6789	#20 Tumbler	250
C3744	#6 Master Driver	Slate Gray	250	C6790	#24 Tumbler	250
C3745	#7 Master Driver	Brass	250	C6791	#26 Tumbler	250
C3746	#8 Master Driver	Copper	250	C6792	#40 Tumbler	250
C3747	#9 Master Driver	Brown	250	C6793	#42 Tumbler	250
C3750	#0 Tumbler	Silver	250	C6794	#46 Tumbler	250
C3751	#1 Tumbler	Black	250	C6795	#60 Tumbler	250
C3752	#2 Tumbler	Violet	250	C6796	#62 Tumbler	250
C3753	#3 Tumbler	Red	250	C6797	#64 Tumbler	250
C3754	#4 Tumbler	Blue	250	C6798	Tumbler Spring	500
C3755	#5 Tumbler	Fuchsia	250			
C3756	#6 Tumbler	Slate Gray	250			
C3757	#7 Tumbler	Brass	250			
C3758	#8 Tumbler	Copper	250			
C3759	#9 Tumbler	Brown	250			

display boards

CAM LOCKS Pin Tumbler



V69B-1 Board

V69B-1 Board displays C8101, C8102, C8103, C8106, C8108, C8109 and C8183 (C8188), with "The Advantage Plus" feature.

DOOR & DRAWER LOCKS Pin Tumbler



V69B-2 Board

V69B-2 Board displays pin tumbler door and drawer locks with "The Advantage Plus" feature, C8163, C8173 and C8178. Also shown, C8131, C8133 and C8139; along with furnished strikes.

MAIL BOX LOCKS Pin Tumbler



V69B-3 Board

V69B-3 Board displays pin tumbler mail box locks, C8710 thru C8726. 17 locks total.


MAIL BOX LOCKS Multi-Cam-Pin Tumbler



V69B-4 Board

V69B-4 Board displays the popular C8730 and C8735 mail box locks; each having a selection of five cams to meet specific mounting requirements.

SLIDING DOOR LOCKS- SPECIAL USE LOCKS

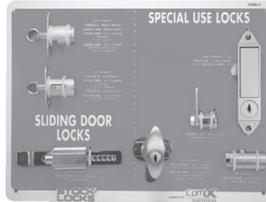

V69B-5 Board

V69B-5 Board displays C8043, C8140 and C8142 sliding door locks. Also includes C8154 knob lock, C8150 file cabinet lock, C8070 panel lock, and C8065 screwdriver Cam Latch.

CAM LOCKS Disc Tumbler



V69B-6 Board

V69B-6 Board displays disc tumbler cam locks C8051 thru C8055, with reference to C8073 and C8075 flexafunction locks. C8060 and C8080 with flexafunction feature. Also shown is C8062.

HANDLE LOCKS Disc Tumbler



V69B-7 Board

V69B-7 Board displays C8747, C8751 and C8759 representing a selection of handle locks. Also displayed are C8756 and C8757 latch plate and tongue.

CAM ASSORTMENT Pin Tumbler - Disc Tumbler STRIKES



V69B-8 Board

V69B-8 Board displays all the available cams for both disc tumbler and pin tumbler cylinder cam locks. Also displayed are examples of available strikes, flat washer and barrel key escutcheon.

MAIL BOX LOCKS Pin Tumbler

New!



V69B-9 Board

V69B-9 Board displays pin tumbler mail box locks for USPS specification USPS-L-1172C: C9100 and C9200 (and cam C7120), and postal locks for non-USPS delivered sites C9300, C9400 and C9500.

FURNITURE LOCKS



V69B-10 Board

V69B-10 Board displays C8384 and C8414 lid locks. Other locks displayed include C8207, C8252 and C8826, along with furnished strikes and escutcheons.

FURNITURE LOCKS Small Diameter Disc Tumbler



V69B-12 Board

V69B-12 Board displays disc tumbler RemovaCore locks D8840, D8836, D8838, C8834, C8830 and C8850 plug core.

DRAWER & DOOR LOCKS Disc Tumbler



V69B-13 Board

V69B-13 Board displays samples of C8703 thru C8706 locks; C8803, D8090 gang lock and C8701 lock with reference to C8137 pin tumbler lock.



CompX
NATIONAL

CompX
SECURITY PRODUCTS

MAIN OFFICE - FACTORY
REGISTERED TO ISO 9001: 2015
CERTIFICATE NO. 10000456 QM15

PO Box 200
Mauldin, SC 29662
PH: 864-297-6655
FAX: 864-297-9987
compX.com

WESTERN DISTRIBUTION CENTER
9370 Buffalo Avenue, Unit 104
Rancho Cucamonga, CA 91730
PH: 909-476-7933
FAX: 909-476-8553

39th Edition

Reorder #: F2644-001
September 2020
Printed in the USA

Copyright 2020
© CompX Security Products



COMPX NATIONAL
REGISTERED TO ISO 9001: 2015
CERTIFICATE NO. 10000456 QM15

